


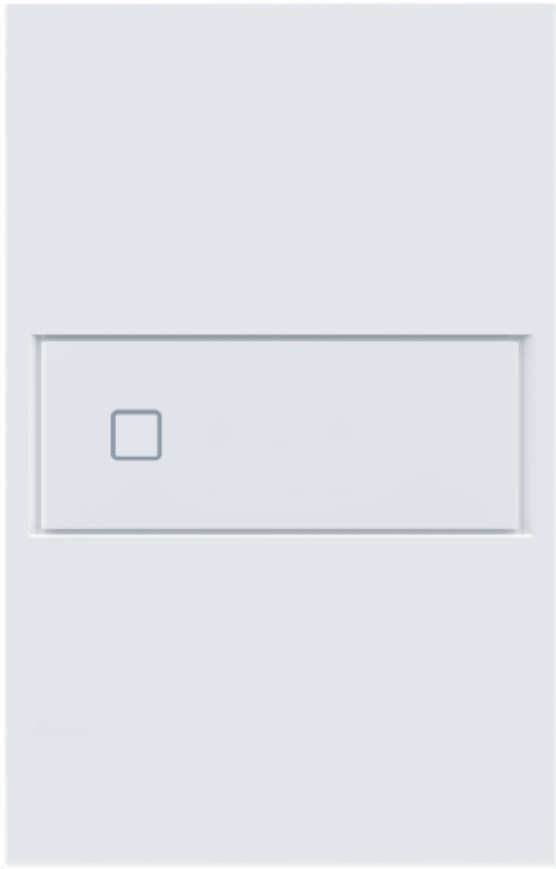

Reference	STO21101BR
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C

Maximum power supported	
FP 0,4 a 0,7	170W
FP > 0,7	300W

Maximum current supported	
3,3A (127V) / 2A (220V)	

Reference	STO21101PTO
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C

Maximum power supported	
FP 0,4 a 0,7	170W
FP > 0,7	300W

Maximum current supported	
3,3A (127V) / 2A (220V)	

Reference	STO21102BR
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C

Maximum power supported	
FP 0,4 a 0,7	170W
FP > 0,7	300W

Maximum current supported	
3,3A (127V) / 2A (220V)	

Reference	STO21102PTO
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C

Maximum power supported	
FP 0,4 a 0,7	170W
FP > 0,7	300W

Maximum current supported	
3,3A (127V) / 2A (220V)	



Reference	STO21103BR
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C

Maximum power supported	
FP 0,4 a 0,7	170W
FP > 0,7	300W


Maximum current supported	
3,3A (127V) / 2A (220V)	



Reference	STO21103PTO
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C

Maximum power supported	
FP 0,4 a 0,7	170W
FP > 0,7	300W

Maximum current supported	
3,3A (127V) / 2A (220V)	

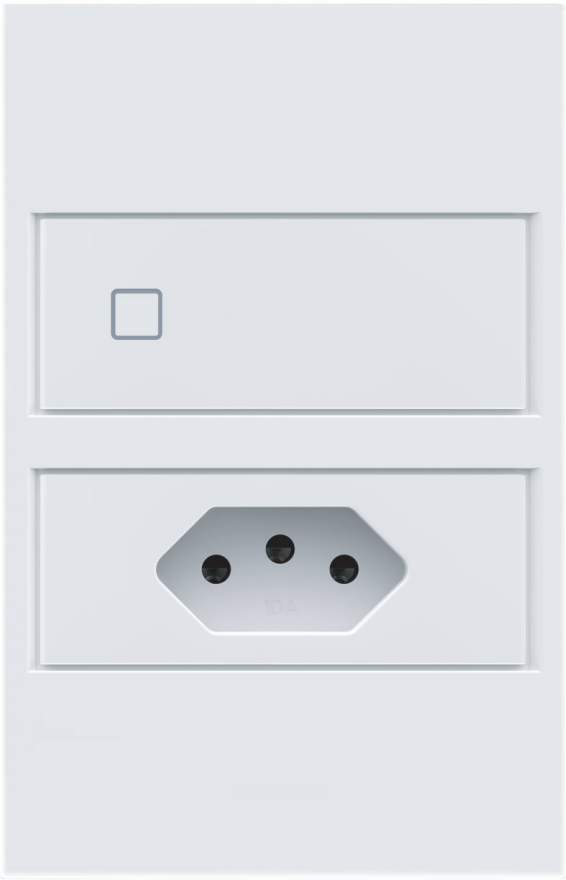

Reference	STO21311BR
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C

Maximum power supported	
Light switch	
FP 0,4 a 0,7	170W
FP > 0,7	300W

Maximum current supported	
Power Outlet	Light switch
10A	3,3A (127V) / 2A (220V)



Reference	STO21311PTO
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C

Maximum power supported	
Light switch	
FP 0,4 a 0,7	170W
FP > 0,7	300W

Maximum current supported	
Power Outlet	Light switch
10A	3,3A (127V) / 2A (220V)




Reference	STO21201BR
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C
Maximum power supported	
FP 0,4 a 0,7	85W
FP > 0,7	150W
Maximum current supported	
1,7A (127V) / 1A (220V)	

Reference	STO21201PTO
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C
Maximum power supported	
FP 0,4 a 0,7	85W
FP > 0,7	150W
Maximum current supported	
1,7A (127V) / 1A (220V)	

Reference	STO21202BR
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C
Maximum power supported	
FP 0,4 a 0,7	85W
FP > 0,7	150W
Maximum current supported	
1,7A (127V) / 1A (220V)	

Reference	STO21202PTO
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C
Maximum power supported	
FP 0,4 a 0,7	85W
FP > 0,7	150W
Maximum current supported	
1,7A (127V) / 1A (220V)	

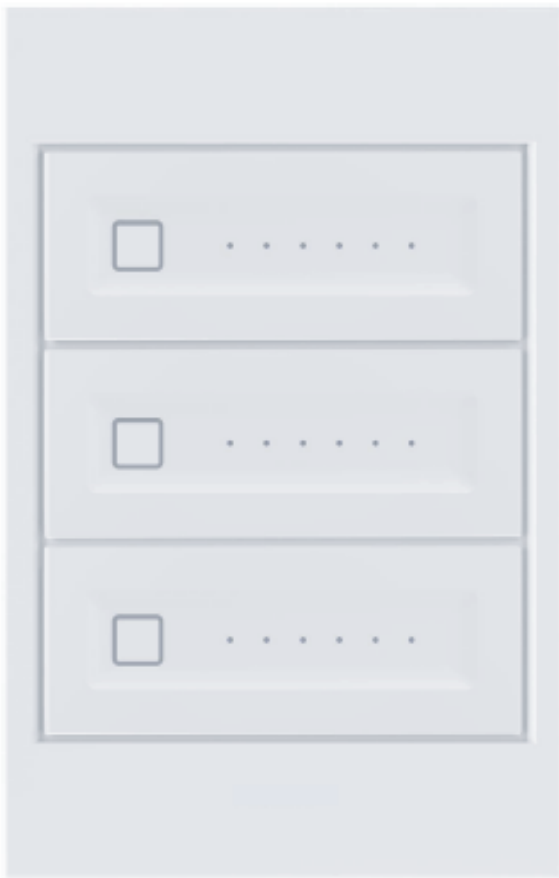

Reference	STO21203BR
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C

Maximum power supported	
FP 0,4 a 0,7	85W
FP > 0,7	150W

Maximum current supported	
1,7A (127V) / 1A (220V)	



Reference	STO21203PTO
Voltage	100-240V~
Frequency	50/60Hz
Wi-Fi	2.4GHz - IEEE 802.11b/g/n
Operating Temp.	-10°C ~ 40°C

Maximum power supported	
FP 0,4 a 0,7	85W
FP > 0,7	150W

Maximum current supported	
1,7A (127V) / 1A (220V)	



Reference	STO21301BR	
Voltage	100-240V~	
Frequency	50/60Hz	
Wi-Fi	2.4GHz - IEEE 802.11b/g/n	
Operating Temp.	-10°C ~ 40°C	

Maximum power supported		
	Dimmer	Light switch
FP 0,4 a 0,7	85W	170W
FP > 0,7	150W	300W


Maximum current supported	
Dimmer	Light switch
1,7A (127V) / 1A (220V)	3,3A (127V) / 2A (220V)



Reference	STO21301PTO	
Voltage	100-240V~	
Frequency	50/60Hz	
Wi-Fi	2.4GHz - IEEE 802.11b/g/n	
Operating Temp.	-10°C ~ 40°C	

Maximum power supported		
	Dimmer	Light switch
FP 0,4 a 0,7	85W	170W
FP > 0,7	150W	300W


Maximum current supported	
Dimmer	Light switch
1,7A (127V) / 1A (220V)	3,3A (127V) / 2A (220V)

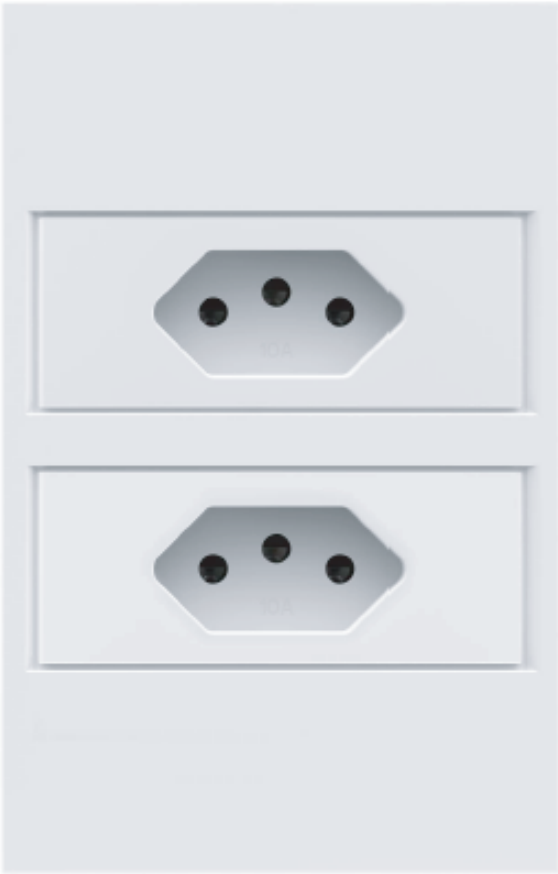

Reference	STO21410BR
Voltage	250V~
Frequency	10A
Wi-Fi	50/60Hz
Operating Temp.	-10°C ~ 40°C



Reference	STO21410PTO
Voltage	250V~
Frequency	10A
Wi-Fi	50/60Hz
Operating Temp.	-10°C ~ 40°C

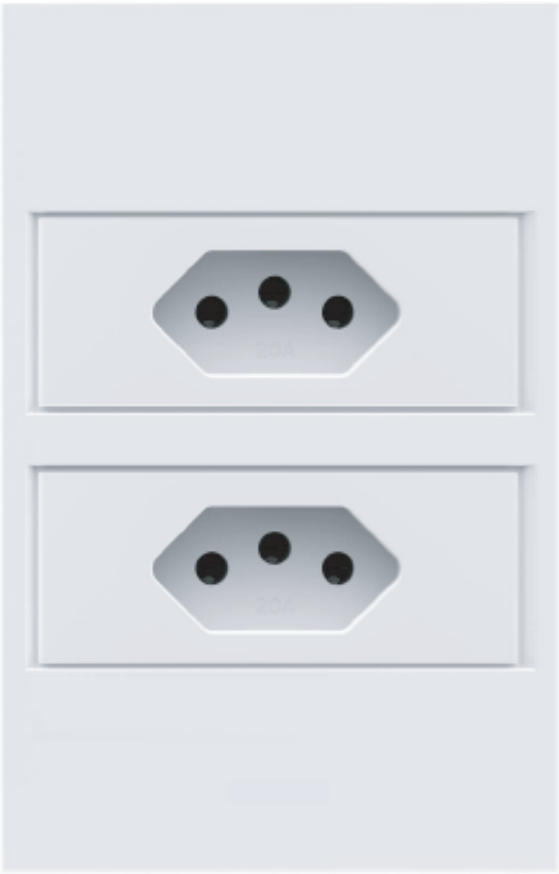

Reference	STO21420BR
Voltage	250V~
Frequency	20A
Wi-Fi	50/60Hz
Operating Temp.	-10°C ~ 40°C



Reference	STO21420PTO
Voltage	250V~
Frequency	20A
Wi-Fi	50/60Hz
Operating Temp.	-10°C ~ 40°C



Reference	STO21430BR
Voltage	250V~
Electric current	10A
Current Max USB-A	4A
Frequency	50/60Hz
Operating Temp.	-10°C ~ 40°C



Reference	STO21430PTO
Voltage	250V~
Electric current	10A
Current Max USB-A	4A
Frequency	50/60Hz
Operating Temp.	-10°C ~ 40°C