

Way Side/ Outdoor In-Ground Lighting





- Super compact body with flat, straight frame;
- 80° horizontal light with almost zero glare;
- Lighting near the ground.



Technical especifications

1,5W	
2 lumens	80°

SIDE 1 BEAM

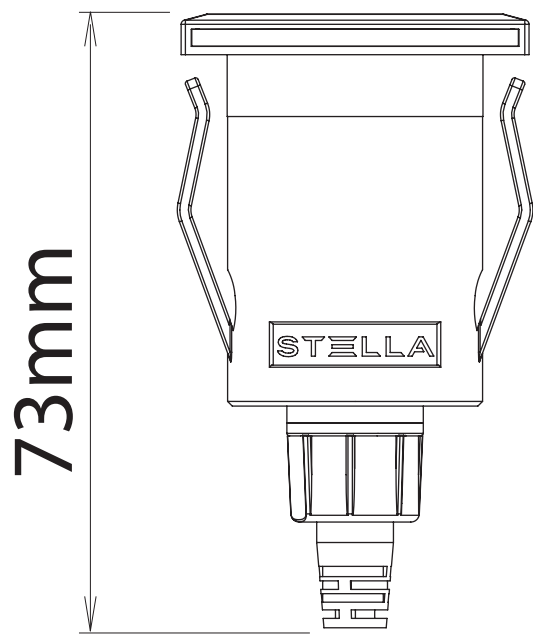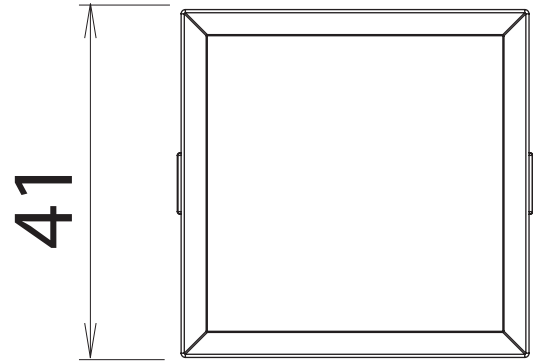



STL21713/30 - BIVOLT	3000K	2lm
----------------------	-------	-----

CRI	>80
IP protection index	IP67
Power factor	>0,5
Life time (L70)	25.000h
Main material	Polycarbonate

Integrated driver.

1,5W	
4 lumens	$\frac{80^\circ}{80^\circ}$

SIDE 2 BEAM

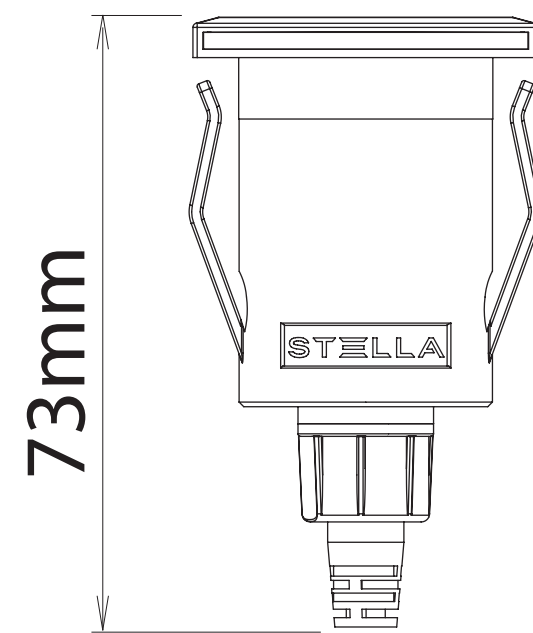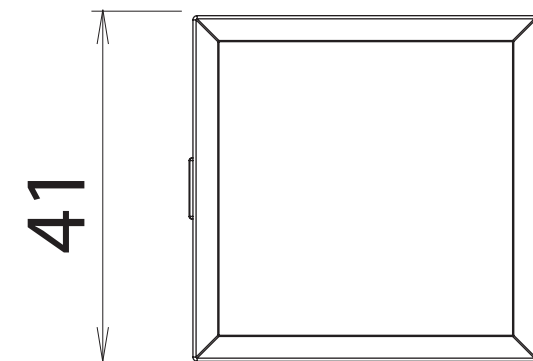


STL21714/30 - BIVOLT	3000K	4lm
----------------------	-------	-----

CRI	>80
IP protection index	IP67
Power factor	>0,5
Life time (L70)	25.000h
Main material	Polycarbonate


Integrated driver.




Technical details

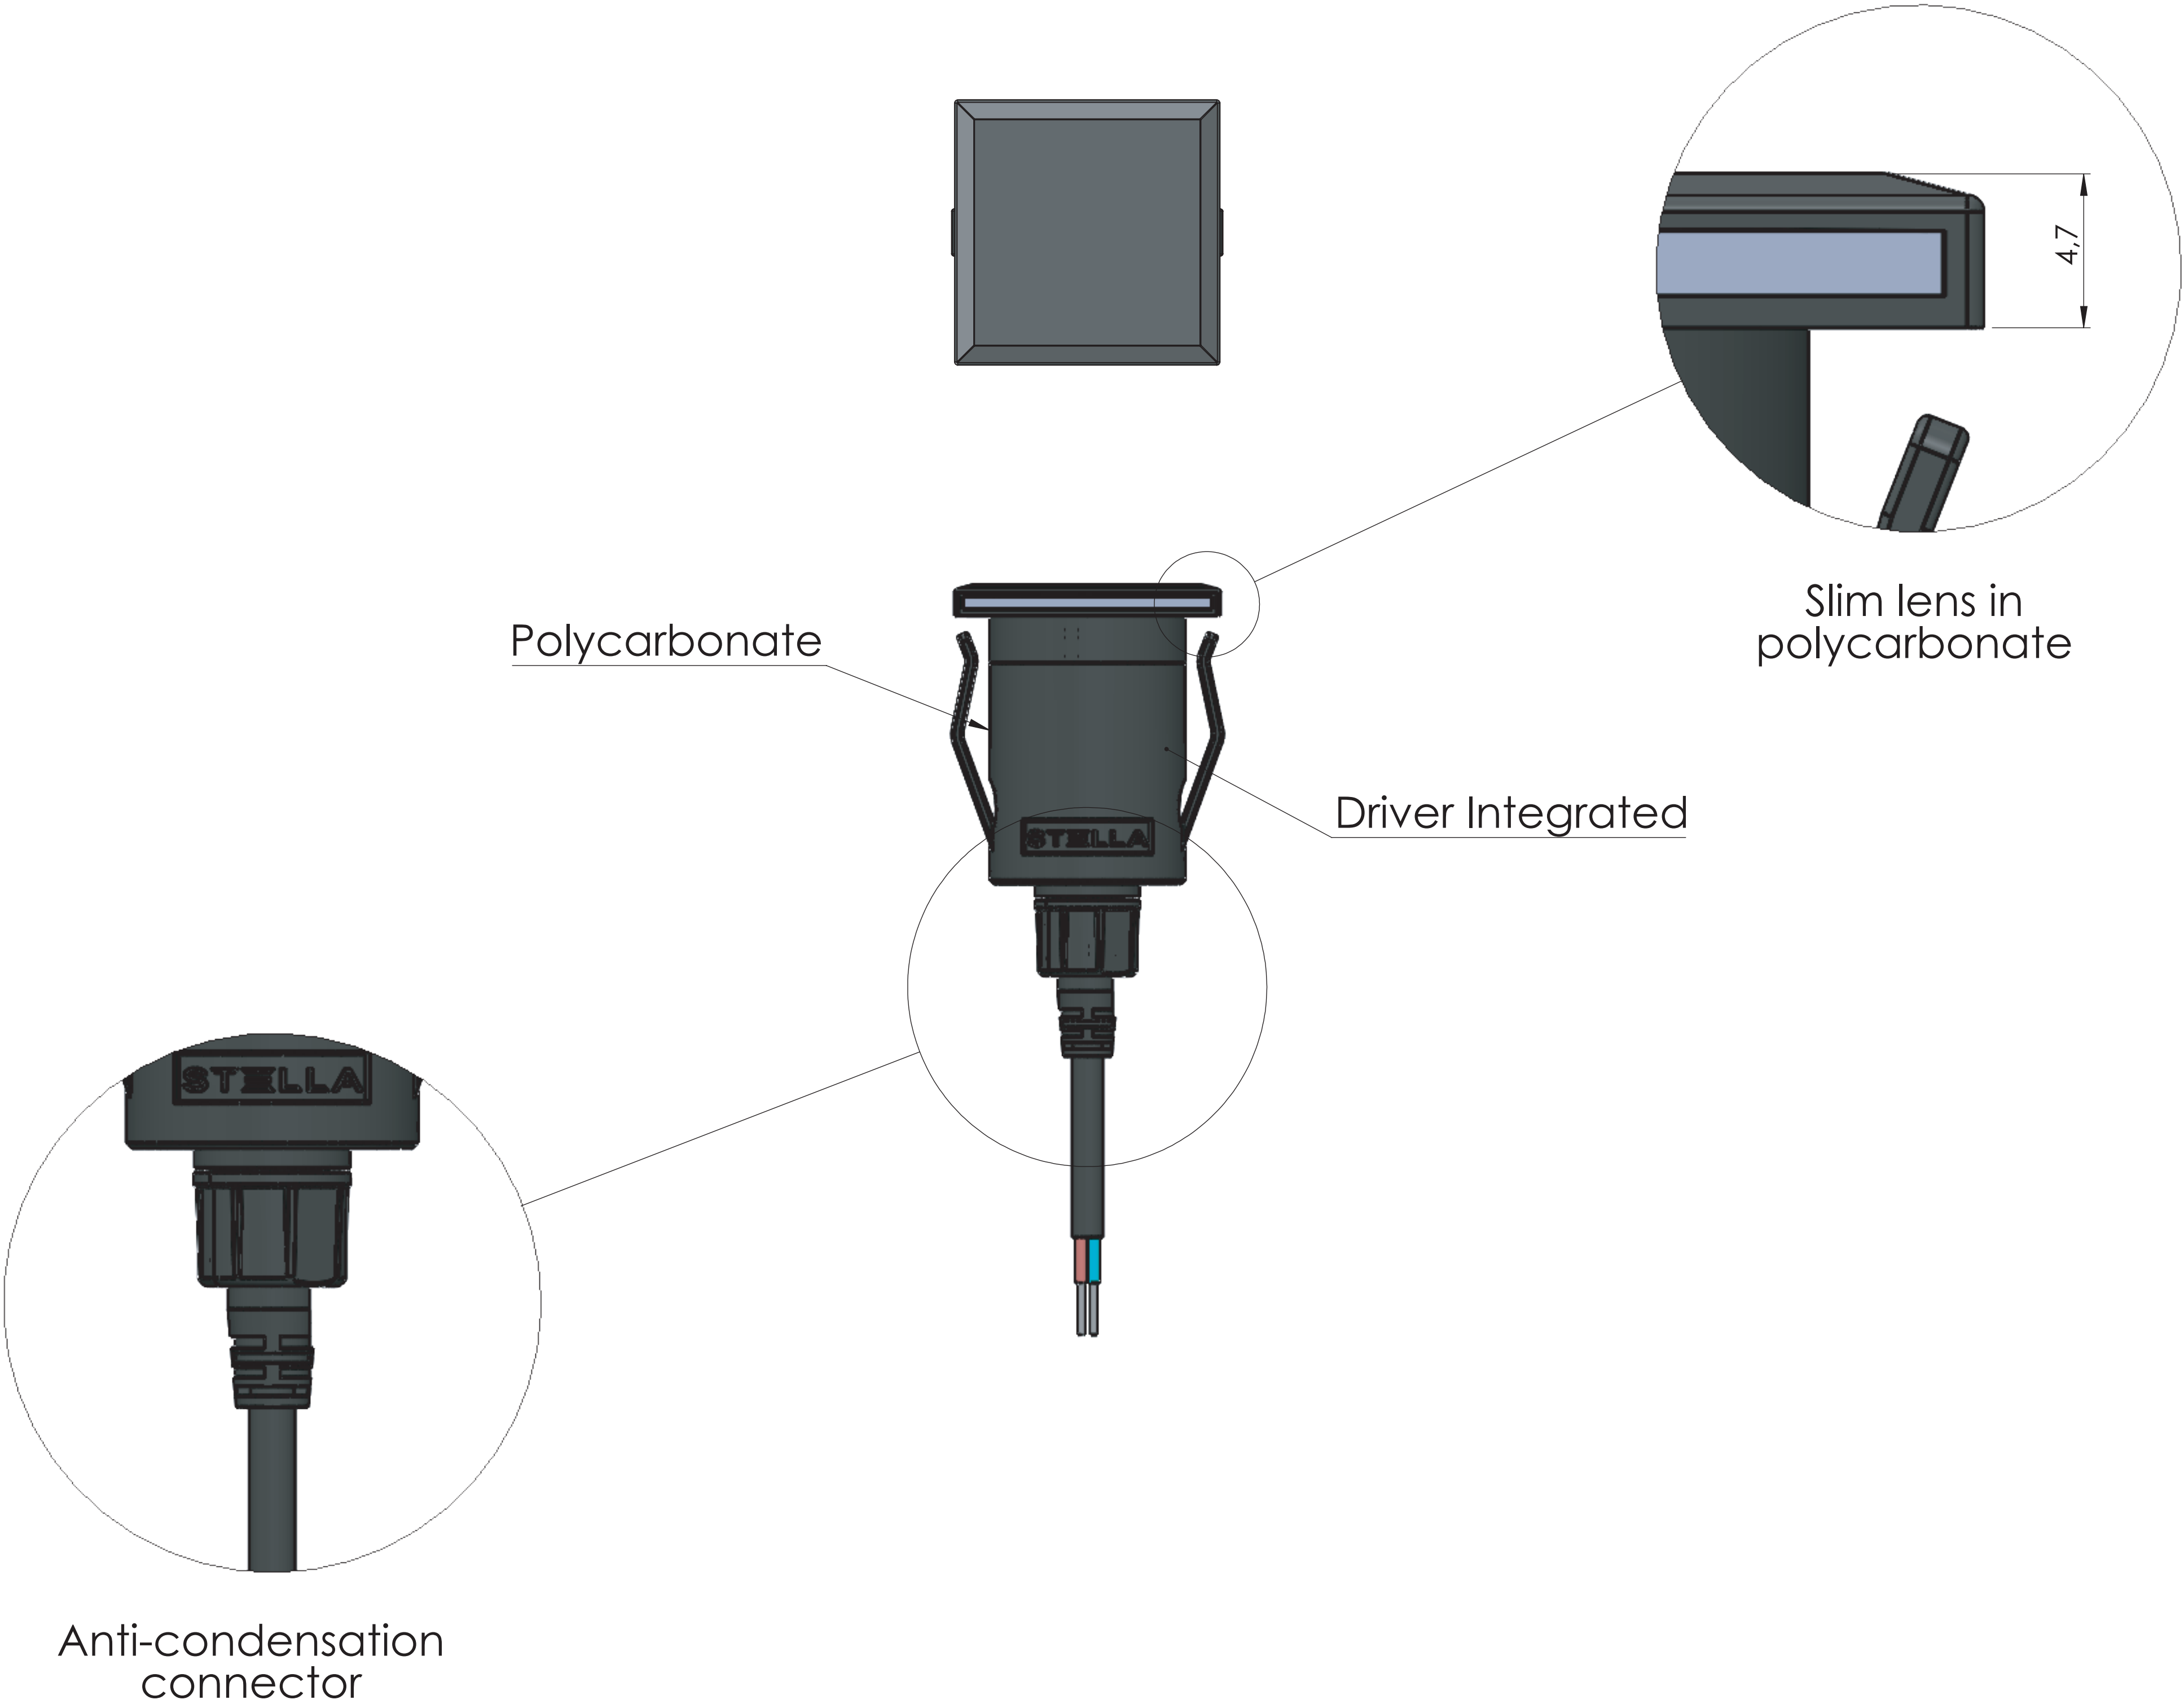

Light Effects

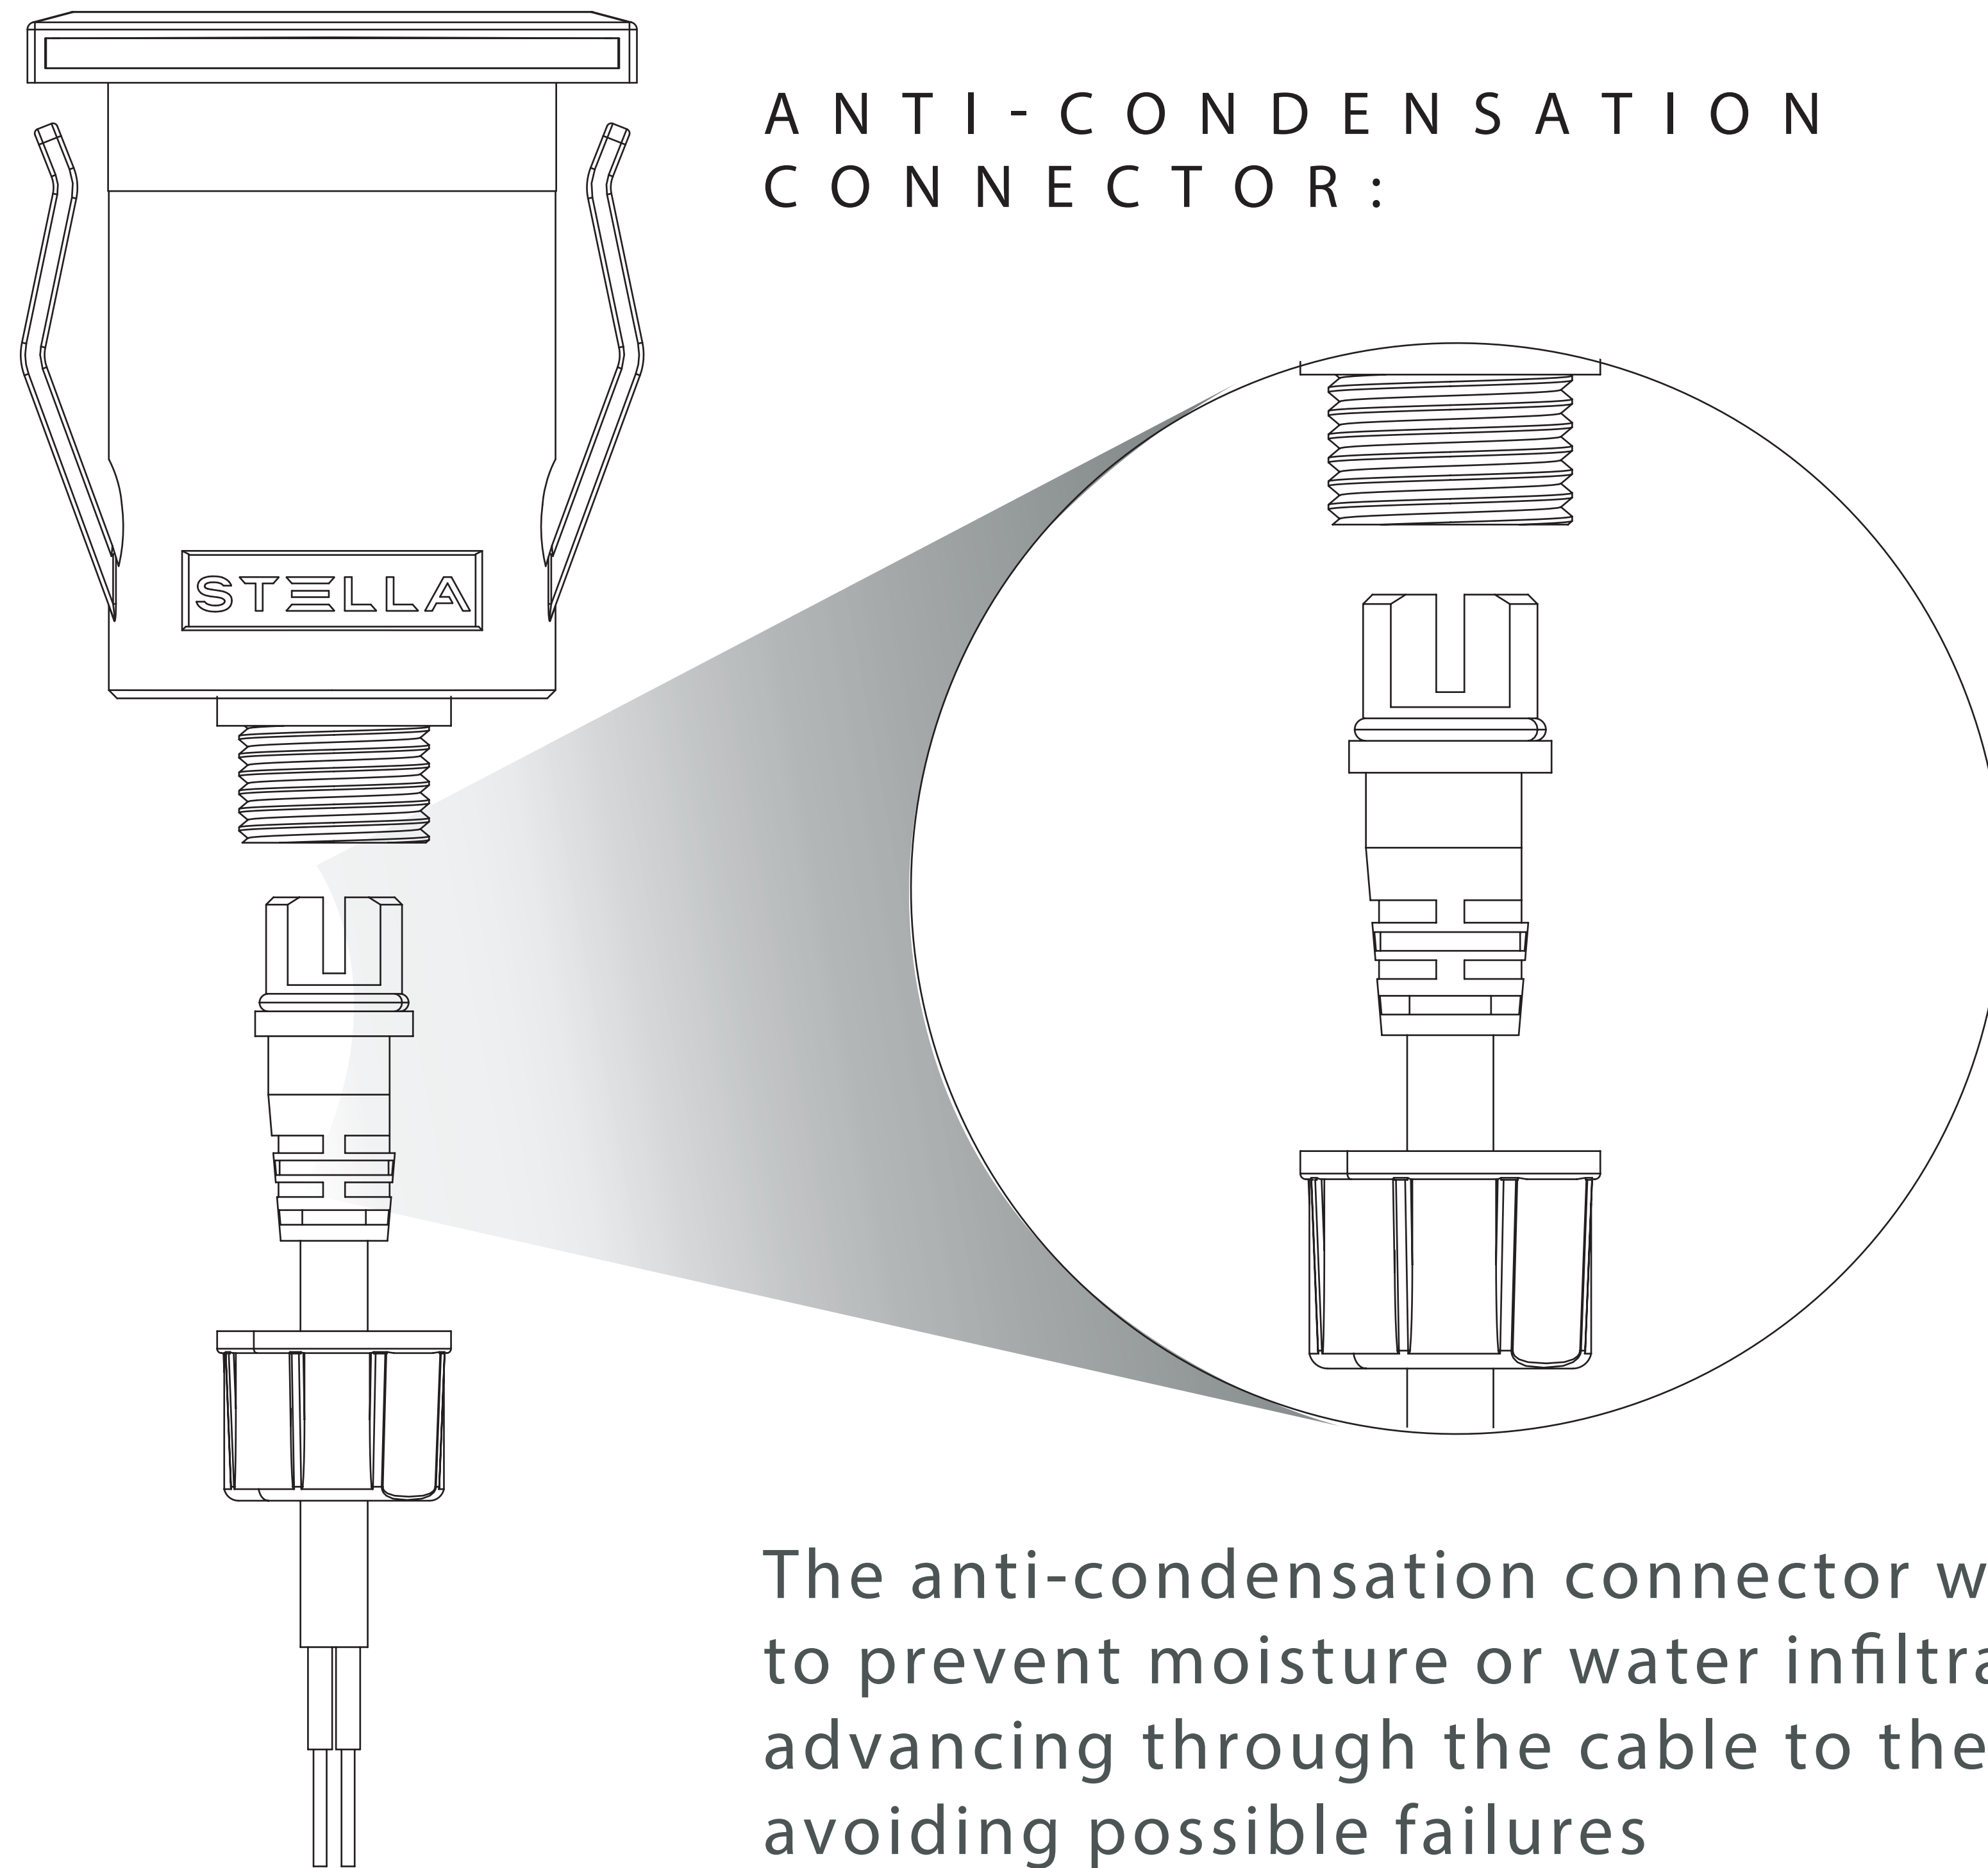

SIDE 1 beam of light

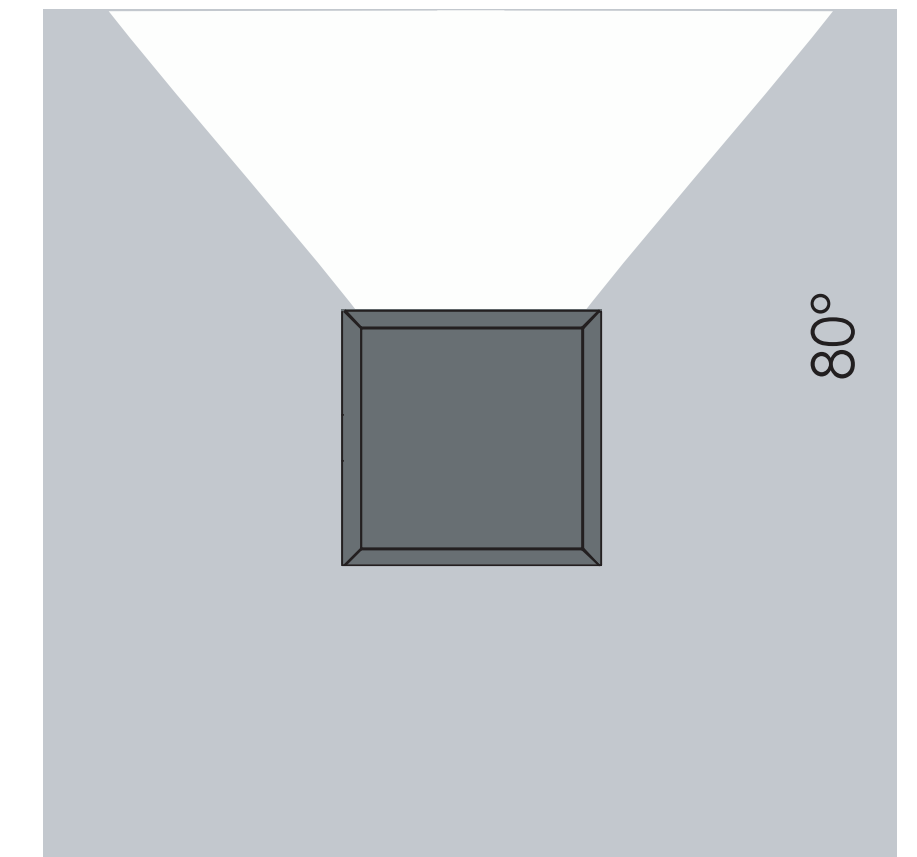

SIDE 2 beam of light

