




BEAUTIFUL

99.99% of the time the extinguisher's life is just waiting. The SHIELD is an art object suitable for any interior for all this time.



AVAILABLE

it is the most beautiful in the world and because of its beauty, it is always in plain sight and thus still easily accessible.



FLAT

the innovative shape saves space as it is the world's flattest fire extinguisher and so can be placed even in narrow corridors.



PROTECTED

thanks to its clever design, it is the only fire extinguisher in the world protected from tampering with the seal, fuse, valve and hose.



ERGONOMIC

the only one in the world designed to be ergonomic, intuitive, easy to use.



ONE-HANDED

the only one in the world that is operated with only one hand in its category.



ECOLOGICAL

uses the highest quality powder extinguishing agent and with 4 kg of powder will extinguish the same fire as a 6 kg extinguisher.

THE HUSSECHUCK





SHIELDING

the only one in the world that protects against heat from the fire when extinguishing.



PROTECTIVE

the only one in the world that protects against falling shards or falling burning plastic.



BREATHING

the only one in the world with an integrated breathing mask - coming soon.



VISION ENHANCING

the only one in the world so spacious that it can carry not only respiratory protection, but also eye and head protection - coming soon.



FIRE EXTINGUISHER

equipped with firefighting equipment in a box or kit, firefighting tarp, spray, grenade, hydrant - coming soon.



HEALING

elements for saving health and life placed in the box - first aid kit, defibrillator, oxygen - coming soon.



DEFENSIVE


in case of threat to life by firearm or other weapon attack, it resists AK39 bullets and serves as a stun gun using fire extinguishing powder, which can be used as a defence against the attacker - coming soon



COMPREHENSIVE

in box integrated evacuation radio with Bluetooth connectivity - coming soon.

THE SHIELD

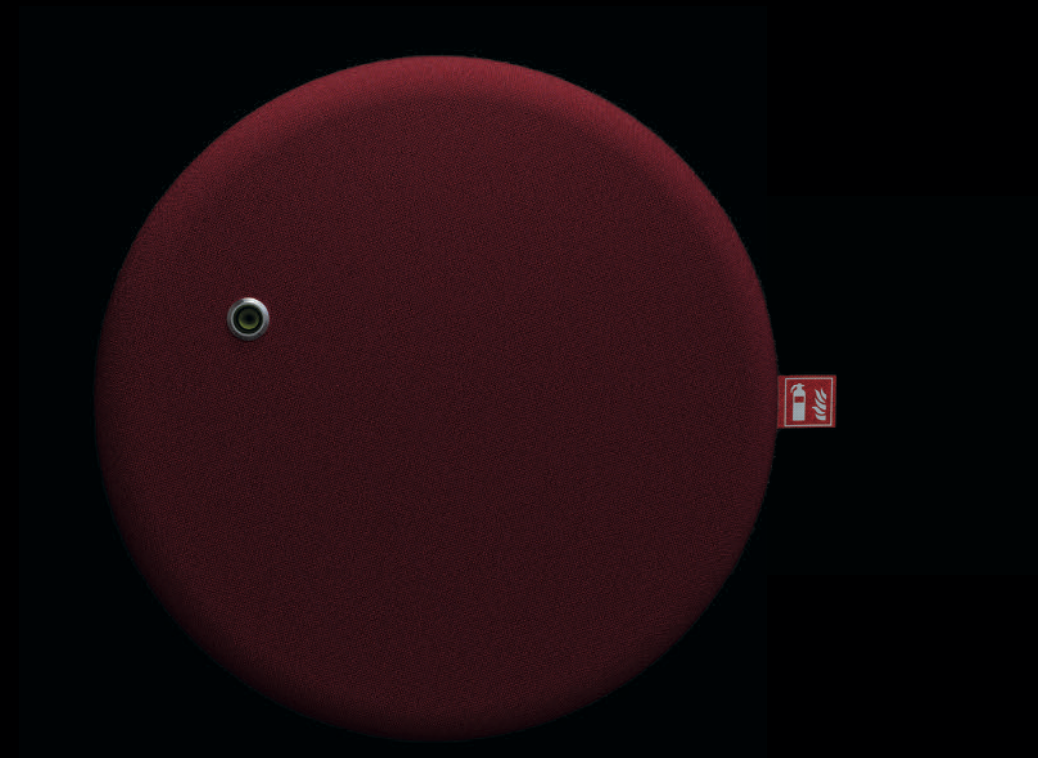





AMPLLA HUSSECHUCK Powder fire extinguisher

- Temperature range from -30°C to +60°C
- Manufactured in accordance to EN 3-7
- Quality Product certification guaranteed by TÜV EN ISO 9001
- Suitable for use on fire involving electrical voltages up to 1. 000 V, at a distance of 1 mand liquid fires.

CHARACTERISTICS:

CYLINDER:	Alloy steel,P235GH
TREATMENT:	Poxypolyestere powder painting, Red RAL 3000.
HANDLE:	ABS - akrylonitril-butadién-styrén
EXTINGUISHING AGENT:	Neutrex super - ammonium dihydrogen phosphate
PROPELLANT:	Nitrogen N2
VALVE:	M45 x 1.5 - chrome-plated brass
TRIGGER:	red ABS RAL 3000
USE:	A B C fire rating (solid materials, flammable liquids, flammable gas)

PRODUCER: Amplla a.s. , Safarikova 1737, 539 01 Hlinsko, Czech republic INo: 284 85 408

TECHNICAL SPECIFICATIONS:

FIRE RATING:	34 A 233 B C
EXTINGUISHING AGENT:	Neutrex super - ammonium dihydrogen phosphate
PROPELLANT:	N2 pressure 15 Bar at 20°C
TEMPERATURE RANGE:	-30°C / +60°C
NOMINAL CHARGE:	4 Kg can be filled to 6 Kg
FULL WEIGHT:	~ 10,8 Kg with 4 Kg charge
DIMENSIONS:	Diameter 620 +/- 2 mm / Widths 76 mm
DISCHARGE TIME:	15 sec. with 4 Kg charge
VALVE TIGHTENING TORQUE:	Minimum 35 Nm, Maximum 55 Nm
CYLINDER PRESSURE TEST:	PT 30 bar
CYLINDER VOLUME:	7,3 L
SAFETY VALVE:	Max 27 bar
CYLINDER MATERIAL:	Alloy steel P235GH
EXTERNAL TREATMENT:	Sandblast and epoxy-polyestere powder painting, Red RAL 3000 colour

Complies with Directive 97/23 / EC on pressure equipment.

AMPLLA SHIELD Powder fire extinguisher

- Temperature range from -30°C to +60°C
- Manufactured in accordance to EN 3-7
- Quality Product certification guaranteed by TÜV EN ISO 9001
- Suitable for use on fire involving electrical voltages up to 1. 000 V, at a distance of 1 m and liquid fires.

CHARACTERISTICS:

CYLINDER:	Alloy steel,P235GH
TREATMENT:	Poxypolyestere powder painting, Red RAL 3000.
SHIELD:	ABS - akrylonitril-butadién-styrén
EXTINGUISHING AGENT:	Neutrex super - ammonium dihydrogen phosphate
PROPELLANT:	Nitrogen N2
VALVE:	M45 x 1.5 - chrome-plated brass
TRIGGER:	red ABS RAL 3000
USE:	A B C fire rating (solid materials, flammable liquids, flammable gas)

PRODUCER: Amplla a.s. , Safarikova 1737, 539 01 Hlinsko, Czech republic INo: 284 85 408

TECHNICAL SPECIFICATIONS:

FIRE RATING:	34 A 233 B C
EXTINGUISHING AGENT:	Neutrex super - ammonium dihydrogen phosphate
PROPELLANT:	N2 pressure 15 Bar at 20°C
TEMPERATURE RANGE:	-30°C / +60°C
NOMINAL CHARGE:	4 Kg can be filled to 6 Kg
FULL WEIGHT:	~ 11,2 Kg with 4 Kg charge
DIMENSIONS:	Diameter 620 +/- 2 mm / Widths 80mm
DISCHARGE TIME:	15 sec. with 4 Kg charge
VALVE TIGHTENING TORQUE:	Minimum 35 Nm, Maximum 55 Nm
CYLINDER PRESSURE TEST:	PT 30 bar
CYLINDER VOLUME:	7,3 L
SAFETY VALVE:	Max 27 bar
CYLINDER MATERIAL:	Alloy steel P235GH
EXTERNAL TREATMENT:	Sandblast and epoxy-polyestere powder painting, Red RAL 3000 colour

Complies with Directive 97/23 / EC on pressure equipment.

CONTACT

Safarikova 1737, 539 01 Hlinsko

www.amplla.com

info@amplla.com.

[@amplla_design](https://www.instagram.com/amplla_design)

[@amplladesign](https://www.facebook.com/amplladesign)