

MAGNETIC
SYSTEMS





Ø 16mm only



Magnetic connection system

Wireless installation allows
360° luminaire rotation

180° Tilttable

Beam
10°-35°



**MAGNETIC
SIX XS**

Tiltable
310°
—
Beam
17°/ 23°/ 34°



**MAGNETIC
TOP MICRO**

Flux
190/210 lm
—
Beam
19°/ 38°



**MAGNETIC
iO MICRO**

Tiltable
155°
—
Beam
20°/ 40°/ 54°



**MAGNETIC
FIT 27**

Tiltable
90°
—
Beam
22°/ 37°/ 46°



**MAGNETIC
FIT 20**

Tiltable
90°
—
Beam
12°/ 30°/ 54°





					CCT	Beam	LOR
MAGNETIC PLUS Micro	A433-00-00-	WT	NT		2700K	10°-35°	10-17%
	A433-00-01-	WT	NT		3000K	10°-35°	10-17%
	A433-00-02-	WT	NT		4000K	10°-35°	10-17%

III IP20 | CRI>90 | L80B10 >50,000h




*DRIVER OPTIONS		P	I	CCT	Flux
 NO DIM	0434-01-53 1 to 3 Magnetic Plus Micro	4,7W	400mA	2700K	500 lm
				3000K	520 lm
				4000K	570 lm
 DALI	0434-01-54 1 to 3 Magnetic Plus Micro	4,7W	400mA	2700K	500 lm
				3000K	520 lm
				4000K	570 lm

220 V~ | DRIVER MUST BE PLACED ON REMOTE
240

MAGNETIC CONNECTOR A435-00-00 | W | N |

** MANDATORY FOR INSTALLATION

III IP20 | Ø16

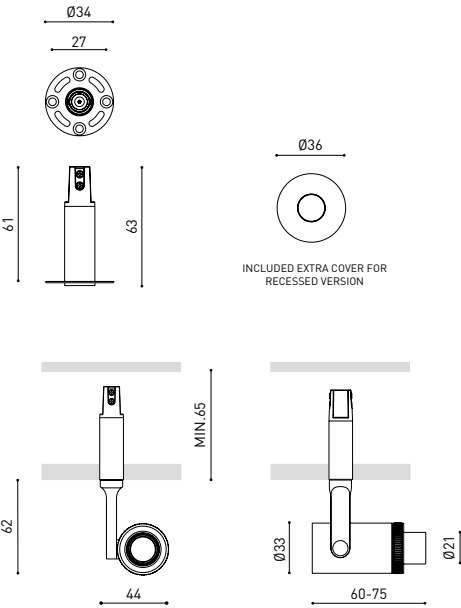

COLOUR | WT □ | NT ■ | MATERIAL | AL | OPTICAL PMMA |

RAL ⓘ » 538

OTHER DIM PLEASE CONSULT | WALL MOUNTING PLEASE CONSULT

» PLEASE CONSULT



						CCT	Beam	LOR
MAGNETIC FIT 20	A431-00-10-	WT	NT	G		2700K	12°	87%
	A431-00-11-	WT	NT	G		3000K	12°	87%
	A431-00-20-	WT	NT	G		2700K	30°	88%
	A431-00-21-	WT	NT	G		3000K	30°	88%
	A431-00-30-	WT	NT	G		2700K	54°	81%
	A431-00-31-	WT	NT	G		3000K	54°	81%

IP20 | CRI>90 | L80B10
>50.000h




*DRIVER OPTIONS		P	I	CCT	Flux
 NO DIM	0434-00-40 1 to 12 Magnetic Fit 20	2,1W	700mA	2700K	127 lm
				3000K	150 lm
 DALI	0434-00-46 1 to 13 Magnetic Fit 20	2,1W	700mA	2700K	127 lm
				3000K	150 lm

220
240 V~ | DRIVER MUST BE PLACED ON REMOTE

MAGNETIC CONNECTOR

A435-00-00 | W | N |

** MANDATORY FOR INSTALLATION

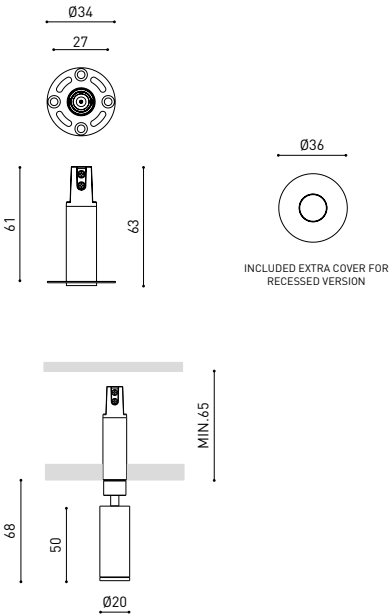

COLOUR | WT ☐ | NT ☐ | G ☐ | MATERIAL | AL ☐ | PC ☐

RAL » 538

OTHER DIM PLEASE CONSULT | WALL MOUNTING PLEASE CONSULT

» PLEASE CONSULT







						CCT	Beam	LOR
MAGNETIC FIT 27	A432-00-10-	WT	NT	G		2700K	22°	84%
	A432-00-11-	WT	NT	G		3000K	22°	84%
	A432-00-20-	WT	NT	G		2700K	37°	82%
	A432-00-21-	WT	NT	G		3000K	37°	82%
	A432-00-30-	WT	NT	G		2700K	46°	81%
	A432-00-31-	WT	NT	G		3000K	46°	81%

III IP20 | CRI>90 | L80B10
>50.000h



*DRIVER OPTIONS


		P	I	CCT	Flux
 NO DIM	0434-01-53 1 to 3 Magnetic Fit 27	4,5W	400mA	2700K	440 lm
				3000K	475 lm
 DALI	0434-01-54 1 to 3 Magnetic Fit 27	4,5W	400mA	2700K	440 lm
				3000K	475 lm

220
240 V~ | DRIVER MUST BE PLACED ON REMOTE

MAGNETIC CONNECTOR

A435-00-00 | W | N |

** MANDATORY FOR INSTALLATION

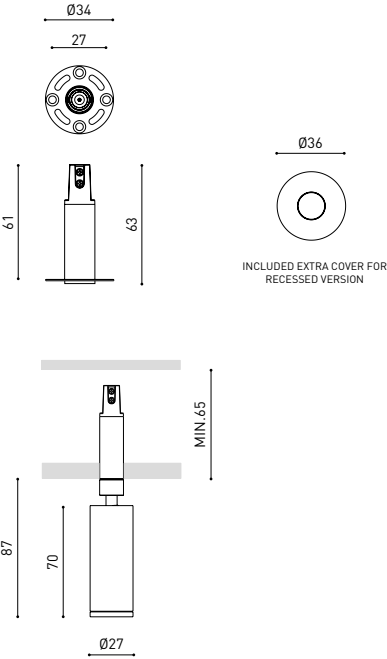

COLOUR | WT ☐ | NT ☐ | G ☐

MATERIAL | AL ☐ | PC ☐

RAL » 538

OTHER DIM PLEASE CONSULT | WALL MOUNTING PLEASE CONSULT

» PLEASE CONSULT





					CCT	Beam	LOR
MAGNETIC SIX XS	A429-00-10-	WT	NT		2700K	17°	90%
	A429-00-11-	WT	NT		3000K	17°	90%
	A429-00-12-	WT	NT		4000K	17°	90%
	A429-00-20-	WT	NT		2700K	23°	86%
	A429-00-21-	WT	NT		3000K	23°	86%
	A429-00-22-	WT	NT		4000K	23°	86%
	A429-00-30-	WT	NT		2700K	34°	88%
	A429-00-31-	WT	NT		3000K	34°	88%
	A429-00-32-	WT	NT		4000K	34°	88%

III IP20 | CRI>90 | L80B10
>50,000h





*DRIVER OPTIONS

*DRIVER OPTIONS		P	I	CCT	Flux
 NO DIM	0434-00-42 1 to 4 Magnetic Six XS	4,5W	500mA	2700K	470 lm
				3000K	500 lm
				4000K	530 lm
 DALI	0434-00-44 1 to 4 Magnetic Six XS	4,5W	500mA	2700K	470 lm
				3000K	500 lm
				4000K	530 lm


220 V~ | DRIVER MUST BE PLACED ON REMOTE | DIM PHASE CUT PLEASE CONSULT

MAGNETIC CONNECTOR A435-00-00 | W | N |

** MANDATORY FOR INSTALLATION



INCLUDED EXTRA COVER FOR
RECESSED VERSION

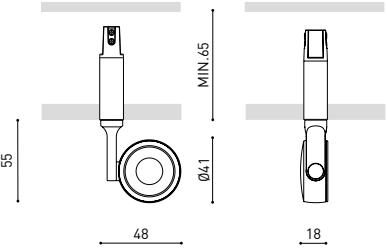

OPTIONAL

SIX High Chromatic Led ⓘ » 536
NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

COLOUR | WT □ | NT ■ |

MATERIAL | AL | PC |

RAL ⓘ » 538

WALL MOUNTING PLEASE CONSULT

» PLEASE CONSULT



					CCT	Beam	LOR
MAGNETIC iO Micro	A434-00-10-	WT	NT		2700K	20°	88%
	A434-00-11-	WT	NT		3000K	20°	88%
	A434-00-12-	WT	NT		4000K	20°	88%
	A434-00-20-	WT	NT		2700K	40°	86%
	A434-00-21-	WT	NT		3000K	40°	86%
	A434-00-22-	WT	NT		4000K	40°	86%
	A434-00-30-	WT	NT		2700K	54°	86%
	A434-00-31-	WT	NT		3000K	54°	86%
	A434-00-32-	WT	NT		4000K	54°	86%

III IP20 | CRI>90 | L80B10
>50.000h






*DRIVER OPTIONS

	P	I	CCT	Flux
 NO DIM	0434-01-53 1 to 3 Magnetic iO Micro	4,7W 400mA	2700K	500 lm
			3000K	520 lm
			4000K	570 lm
 DALI	0434-01-54 1 to 3 Magnetic iO Micro	4,7W 400mA	2700K	500 lm
			3000K	520 lm
			4000K	570 lm

220 V~ | DRIVER MUST BE PLACED ON REMOTE
240

MAGNETIC CONNECTOR A435-00-00 | W | N |

** MANDATORY FOR INSTALLATION

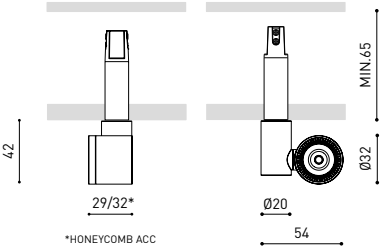

*HONEYCOMB ACC

OPTIONAL ACCESSORIES

NOT SOLD SEPARATELY

iO Micro Beam Mixer Diffuser***

A387-00-00



iO Micro Anti-glare Honeycomb Louver***

A387-00-01 | WT | NT |



COLOUR | WT □ | NT ■ | MATERIAL | AL | PC

RAL » 538

OTHER DIM PLEASE CONSULT | WALL MOUNTING PLEASE CONSULT

*** ACCESSORIES AFFECT THE LIGHTING PARAMETERS

» PLEASE CONSULT



					CCT	Beam	LOR
MAGNETIC TOP Micro	A430-00-10-	WT	NT		2700K	19°	90%
	A430-00-11-	WT	NT		3000K	19°	90%
	A430-00-20-	WT	NT		2700K	38°	92%
	A430-00-21-	WT	NT		3000K	38°	92%

III IP20 | CRI>90 | L80B10
>50.000h



*DRIVER OPTIONS

		P	I	CCT	Flux
 NO DIM	0434-00-40 1 to 12 Magnetic Top Micro	2,1W	700mA	2700K	190 lm
				3000K	210 lm
 DALI	0434-00-46 1 to 13 Magnetic Top Micro	2,1W	700mA	2700K	190 lm
				3000K	210 lm



220
240 V~ | DRIVER MUST BE PLACED ON REMOTE

MAGNETIC CONNECTOR

A435-00-00 | W | N |

** MANDATORY FOR INSTALLATION

III IP20 | Ø16

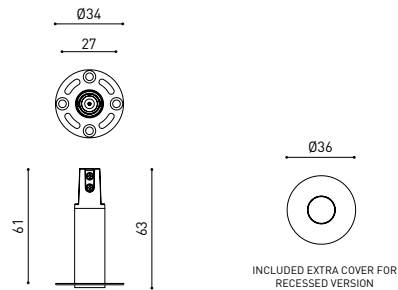

COLOUR | WT ☐ | NT ☐ |

MATERIAL | AL ☐ | PC ☐ |

RAL » 538

OTHER DIM PLEASE CONSULT | WALL MOUNTING PLEASE CONSULT

» PLEASE CONSULT