



TRAPEZE 360

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | PATENT PENDING

REV 04.04.25



DESCRIPTION

Trapeze 360 is a flexible, architectural lighting system that blends form and function to create continuous, 360-degree illumination without pixelation. Its sculptural, minimal design provides a striking visual element while delivering exceptional color rendering for a clean, uninterrupted glow.

Designed to offer both a sophisticated aesthetic and an inviting ambiance, Trapeze 360 enhances interiors with its fluid, seamless flow. Choose from Static White, Warm Dim (24D & 27D), Tunable White (2K6K & 27K6), or TruColor RGBTW which is our premier light engine with a wide spectrum from 1500K-6500K and exceptional color rendering (94+ CRI, 90+ R9). TruColor RGBTW takes Tunable White to the next level. With the addition of the red, green, and blue channels to the tunable white we're able to achieve a level of quality, performance, and accuracy that was previously unattainable. TruColor RGBTW can be controlled with either DMX or WiZ Pro wireless controls. With flexible configuration options and precision engineering, Trapeze 360 serves as both a functional lighting solution and a design statement, making it the perfect solution for a wide range of applications. For custom designs and quotes, send drawings to design@PureEdgeLighting.com.


LUMEN PERFORMANCE AT 3000K 5W PER FOOT

LUMEN OUTPUT	363 lm/ft	EFFICIENCY	72 lm/watt
CRI	92	Rg	98
BEAM ANGLE	360°	BEAM TOLERANCE	+/- 30CCT

SPECIFICATIONS

DIMENSIONS	DIA: 1CF = 0.9" and 2CF = 1.2"
INPUT	24VDC with 5" leads
POWER SUPPLIES	Remote 24VDC power supply required
POWER CONSUMPTION	5 or 10 watts per foot
INCREMENTS	2.4" or 3"
MAX LENGTH	40' at 5 watts, 20' at 10 watts
BENDING	4" minimum radius
MATERIAL	UV Resistant Silicon
OPERATING TEMPERATURE	-4° F (-20° C) to 122° F (+50° C)
AVERAGE LED LIFE	50,000 hrs
WARRANTY	5 Year pro-rated
COMPLIANCE	Class 2 Wiring Indoor Applications, Outdoor Wet Location, ETL listed

TRAPEZE 360 OPTION EXAMPLES



1DF & 2DF Diffused Flex



1CF & 2CF Cora Weave Flex



REMOTE POWER SUPPLIES*, DIMMERS & CONTROLS

(SOLD SEPARATELY)

24VDC, Class 2 wiring

Static White

- [UNI Driver: Universal Dimming \(TRIAC, ELV, 0-10V\)](#)

Warm Dim

- [UNI Driver: Universal Dimming \(TRIAC, ELV, 0-10V\)](#)
- [Make It Smart: Pure Smart™ Wi-Fi Dimmer](#)

Tunable White

- [0-10V](#): Requires two dimmers, one for intensity and one for color temperature
- [DMX Dynamic Color Changing](#): Must be used with PureEdge [Controllers](#)
- Pure Smart™ WiZ Pro [Power Supplies](#) & [Smart Controls](#)

RGBTW

- [Home Integration Solutions](#)
- Pure Smart™ WiZ Pro [Power Supplies](#) & [Smart Controls](#)

*In-wall mounting and drop ceiling kits available for select power supplies


Cover Finishes



Black




Pure White



Polished Nickel



Satin Brass




1DT Diffused Rigid Tube



1CT Cora Weave Rigid Tube


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

Drawings: T2R - Two recessed Vanishing Point connections in the ceiling

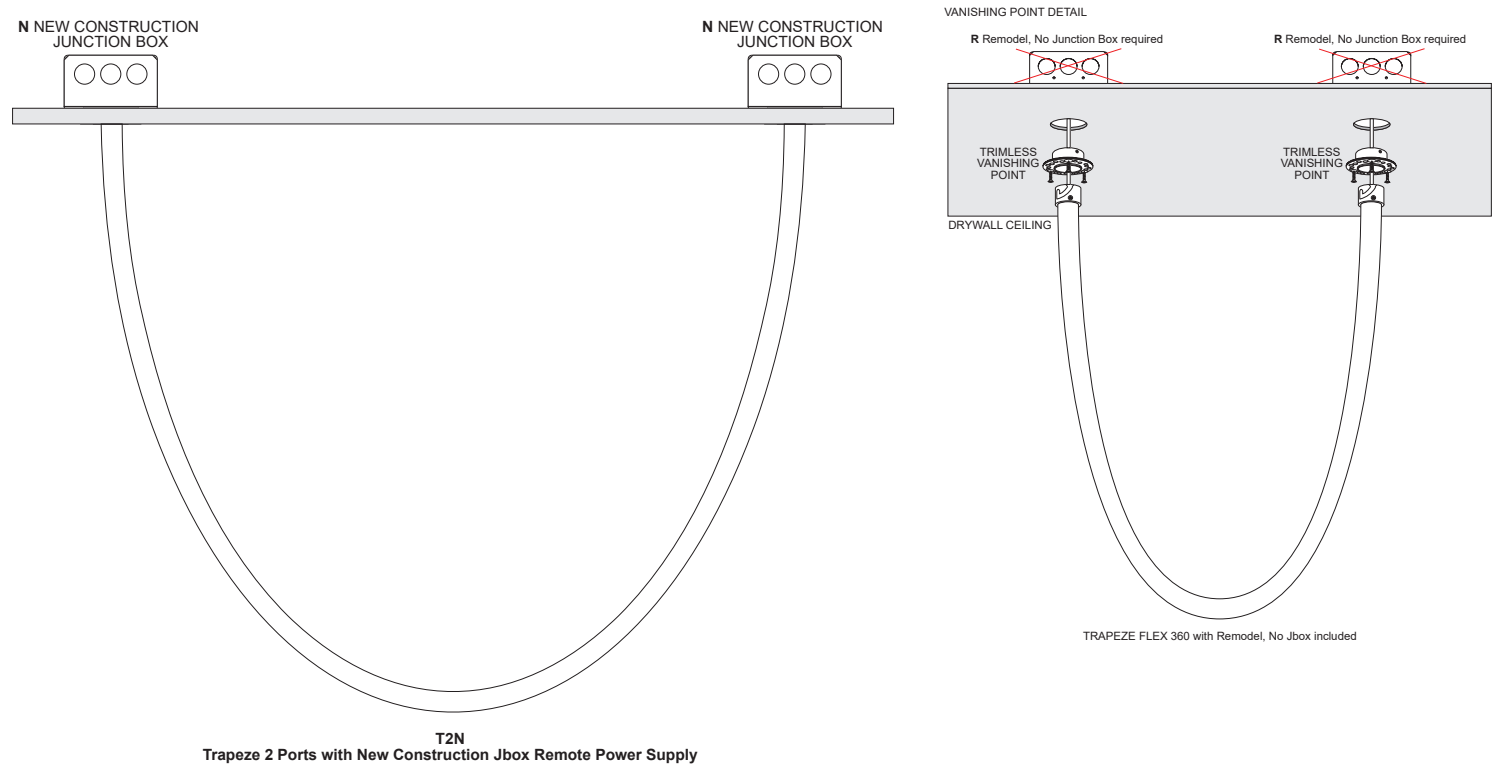

System	Type	Wattage	Trapeze Loop Length in Inches	Color Temperature	Finish
T2N	2CF	10W	86	24K	PW
T2N Trapeze 360, two recessed connection points in the ceiling, New Construction with junction Box provided. Remote Power supply T2R Trapeze 360, two recessed connection points in the ceiling, Remodel , No Junction Box Provided, Remote Power supply	1CF Cora Weave Flex, 0.9" Diameter 1DF Diffused Flex, 0.9" Diameter 2CF Diffused Flex, 1.2" Diameter 2DF Diffused Flex, 1.2" Diameter	5W 5 watts per foot 10W 10 watts per foot	6–480" (5W, Max 40') – Over 20' requires two power supplies 6–240" (10W, Max 20') – Over 10' requires two power supplies	22K 2200K Amber White 24K 2400K Very Warm White 24D* 2400K Warm Dim, Dims to 1800K 27K 2700K Incandescent White 27D* 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 35K 3500K Neutral White 2K6K* Tunable White 2000K–6500K 27K6* Tunable White 2700K–6500K TC TruColor, Premium Tunable White (TW) with RGB Red, Green, Blue	BK Black PW Pure White, Matte Finish SB Satin Brass SN Satin Nickel PN Polished Nickel TL Trimless Plaster-in Canopy CU Custom

[Circumference Calculator](#)




TRAPEZE 360

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

REV 04.04.25

Drawings: TC1R

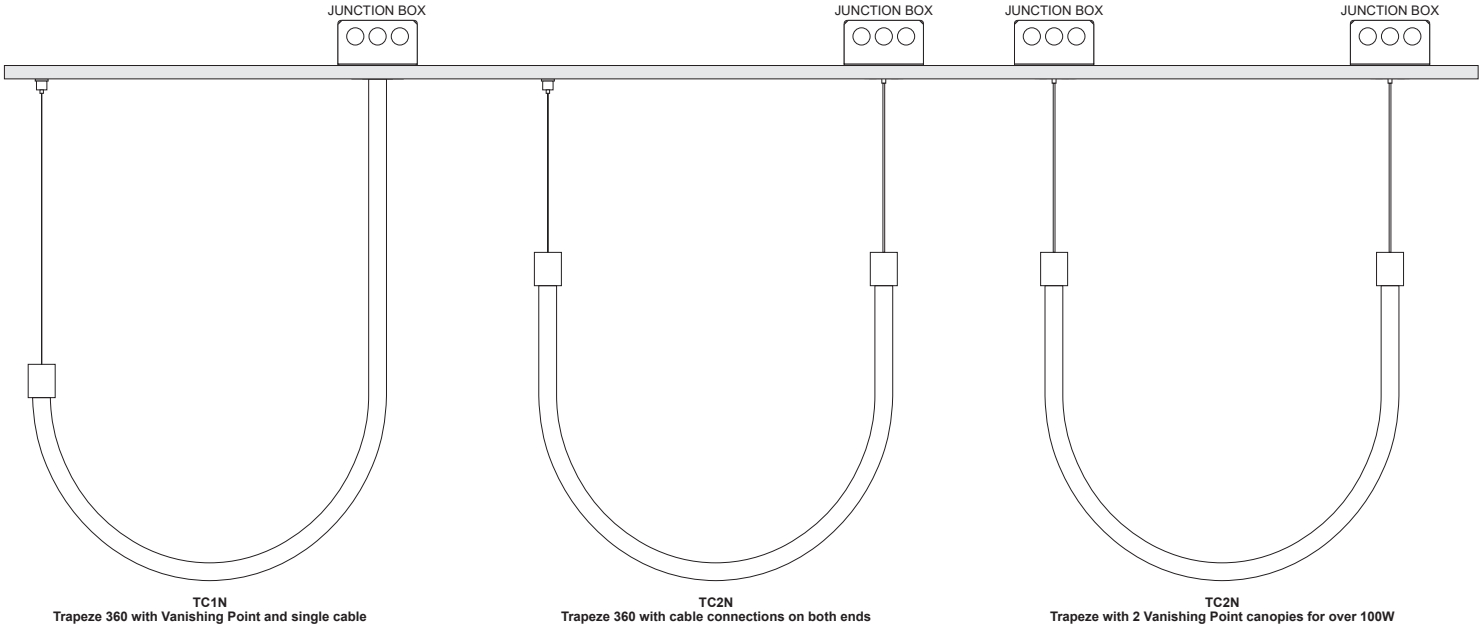

System	Type	Wattage	Length in Inches	Color Temperature	Finish
TC1N	2CF	10W	86	24K	PW
TC1N Trapeze 360, two recessed connection points in the ceiling, New Construction with junction Box provided, Remote Power supply	1CF Cora Weave Flex, 0.9" Diameter 1DF Diffused Flex, 0.9" Diameter 2CF Diffused Flex, 1.2" Diameter 2DF Diffused Flex, 1.2" Diameter	5W 5 watts per foot 10W 10 watts per foot	6-240" (5W, Max 20') 6-120" (10W, Max 10')	22K 2200K Amber White 24K 2400K Very Warm White 24D* 2400K Warm Dim, Dims to 1800K 27K 2700K Incandescent White 27D* 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 35K 3500K Neutral White 2K6K* Tunable White 2000K-6500K 2K6K* Tunable White 2700K-6500K TC TruColor, Premium Tunable White (TW) with RGB Red, Green, Blue	BK Black PW Pure White, Matte Finish SB Satin Brass SN Satin Nickel PN Polished Nickel TL Trimless Plaster-in Canopy CU Custom

[Circumference Calculator](#)

*5W ONLY


System	Type	Wattage	Length in Inches	Color Temperature	Finish
TC2N	2CF	10W	86	24K	PW
TC2N Trapeze 360, two recessed connection points in the ceiling, New Construction with Junction Box provided, Remote Power supply	1CF Cora Weave Flex, 0.9" Diameter 1DF Diffused Flex, 0.9" Diameter 2CF Diffused Flex, 1.2" Diameter 2DF Diffused Flex, 1.2" Diameter	5W 5 watts per foot 10W 10 watts per foot	6-480" (5W, Max 40') - Over 20' requires two power supplies 6-240" (10W, Max 20') - Over 10' requires two power supplies	22K 2200K Amber White 24K 2400K Very Warm White 24D* 2400K Warm Dim, Dims to 1800K 27K 2700K Incandescent White 27D* 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 35K 3500K Neutral White 2K6K* Tunable White 2000K-6500K 2K6K* Tunable White 2700K-6500K TC TruColor, Premium Tunable White (TW) with RGB Red, Green, Blue	BK Black PW Pure White, Matte Finish SB Satin Brass SN Satin Nickel CH Chrome TL Trimless Plaster-in Canopy CU Custom

*5W ONLY

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

TRAPEZE 360

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

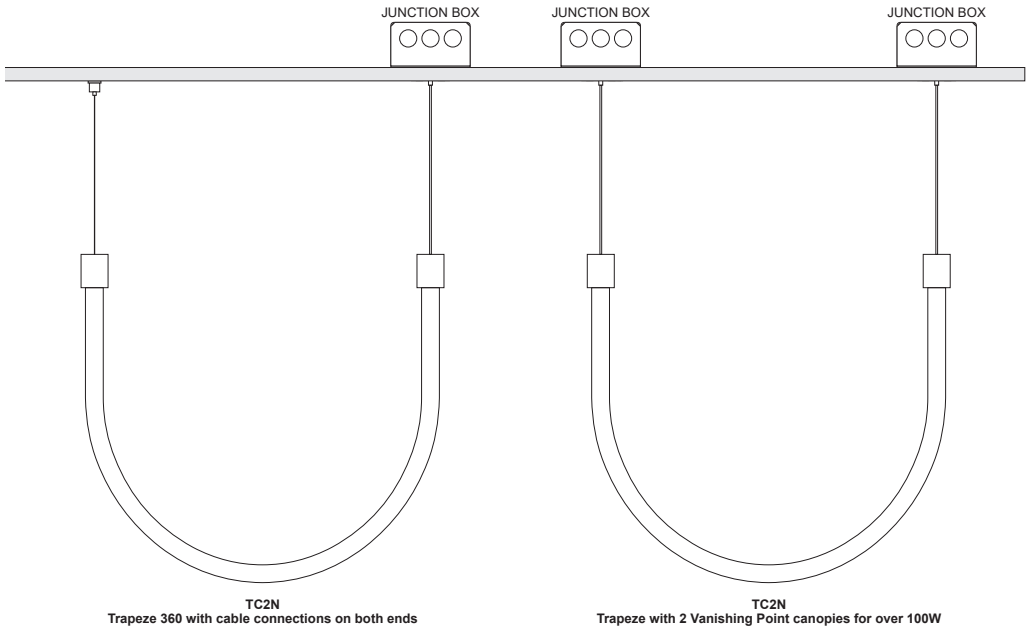


System	Type	Wattage	Length in Inches	Color Temperature	Finish*
TC2N	2CF	10W	86	24K	PW
TC2N Trapeze 360, two recessed connection points in the ceiling. New Construction with Junction Box provided, Remote Power supply TC2R Trapeze 360, 12ft cable on both, Remodel , No Junction Box Provided, Remote Power Supply	1CF Cora Weave Flex, 0.9" Diameter 1DF Diffused Flex, 0.9" Diameter 2CF Diffused Flex, 1.2" Diameter 2DF Diffused Flex, 1.2" Diameter	5W 5 watts per foot 10W 10 watts per foot	6–480" (5W, Max 40') – Over 20' requires two power supplies 6–240" (10W, Max 20') – Over 10' requires two power supplies	22K 2200K Amber White 24K 2400K Very Warm White 24D* 2400K Warm Dim, Dims to 1800K 27K 2700K Incandescent White 27D* 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 35K 3500K Neutral White 2K6K* Tunable White 2000K-6500K 27K6* Tunable White 2700K-6500K TC TruColor, Premium Tunable White (TW) with RGB Red, Green, Blue *5W ONLY	BK Black PW Pure White, Matte Finish SB Satin Brass SN Satin Nickel CH Chrome TL Trimless Plaster-in Canopy CU Custom *ADD 4 AFTER FINISH FOR 4.5" ROUND CANOPY WITH REMOTE POWER ADD 4P FOR 4.5" ROUND CANOPY WITH 60 WATT POWER SUPPLY LIMIT LENGTH OF 144" LIMIT FOR 5W PER FT AND 72" FOR 10W PER FT

TRAPEZE 360

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

Drawings: T1R

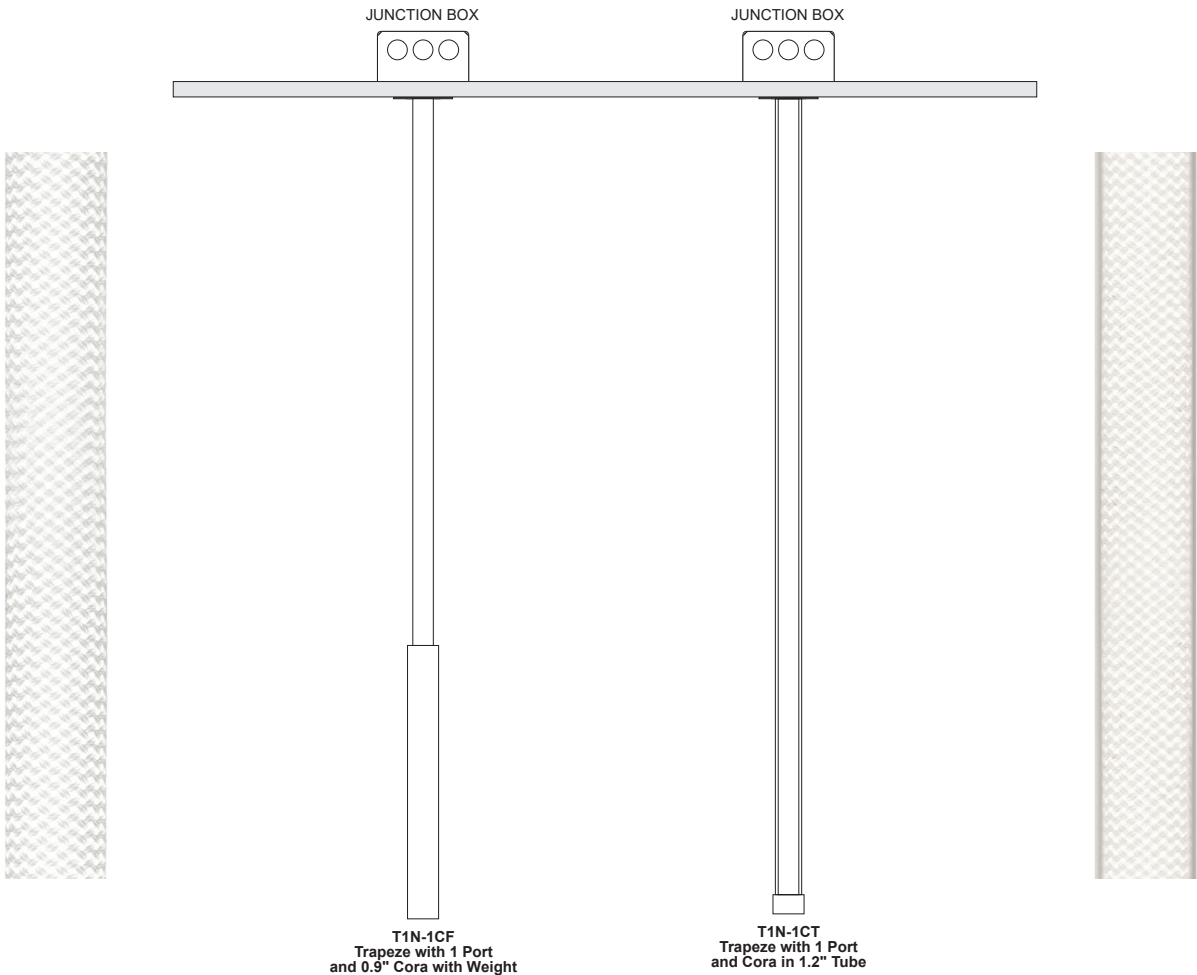

System	Type	Wattage	Length in Inches	Color Temperature	Finish
T1N	1CF	10W	86	24K	PW
T1N Trapeze 360, two recessed connection points in the ceiling, New Construction with Junction Box provided, Remote Power supply T1R Trapeze 360, 1 point in ceiling, Recessed Canopy Connector, Remodel , No Junction Box Provided, Remote Power supply	1CF 1CF Neon (0.9" Dia Cora 360) 1CT Solinas 1.2" Clear Straight Tube 1 Cora" Neon 360 inside tube 1C (.9" Dia Cora 360) 23mm- 6mm strip	5W 5 watts per foot 10W 10 watts per foot	6-480" (5W, Max 40') - Over 20' requires two power supplies 6-240" (10W, Max 20') - Over 10' requires two power supplies	22K 2200K Amber White 24K 2400K Very Warm White 24D* 2400K Warm Dim, Dims to 1800K 27K 2700K Incandescent White 27D* 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 35K 3500K Neutral White 2K6K* Tunable White 2000K-6500K 27K6* Tunable White 2700K-6500K TC TruColor, Premium Tunable White (TW) with RGB Red, Green, Blue *5W ONLY	BK Black PW Pure White, Matte Finish SB Satin Brass SN Satin Nickel PN Polished Nickel TL Trimless Plaster-in Canopy CU Custom

TRAPEZE 360

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

REV 04.04.25

NOMINAL DELIVERED LUMENS

	1CF STATIC WHITE AND WARM DIM											
WATTS PER FOOT	5W					10W						
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D*	30K	30D*	35K	40K
LUMENS PER FOOT (lm/ft)	370	374	390	447	471	684	691	789	720	822	826	871
LUMENS PER WATT (lm/w)	74	75	78	89	94	78	79	90	82	93	94	99
CRI	92+	92+	92+	92+	92+	92+	92+	94+	92+	94+	92+	92+

*Warm Dim: 4.8 Watts

	1DF STATIC WHITE AND WARM DIM											
WATTS PER FOOT	5W					10W						
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D*	30K	30D*	35K	40K
LUMENS PER FOOT (lm/ft)	422	426	444	509	537	780	788	899	821	936	942	993
LUMENS PER WATT (lm/w)	84	85	89	102	107	89	90	102	93	106	107	113
CRI	92+	92+	92+	92+	92+	92+	92+	94+	92+	94+	92+	92+

*Warm Dim: 4.8 Watts

	2CF STATIC WHITE AND WARM DIM											
WATTS PER FOOT	5W					10W						
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D*	30K	30D*	35K	40K
LUMENS PER FOOT (lm/ft)	388	392	409	469	494	718	725	827	755	862	867	914
LUMENS PER WATT (lm/w)	78	78	82	94	99	82	82	94	86	98	98	104
CRI	92+	92+	92+	92+	92+	92+	92+	94+	92+	94+	92+	92+

*Warm Dim: 4.8 Watts

	2DF STATIC WHITE AND WARM DIM											
WATTS PER FOOT	5W						10W					
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D*	30K	30D*	35K	40K
LUMENS PER FOOT (lm/ft)	440	445	463	531	560	813	822	938	856	977	982	1036
LUMENS PER WATT (lm/w)	88	89	93	106	112	92	93	107	97	111	112	118
CRI	92+	92+	92+	92+	92+	92+	92+	94+	92+	94+	92+	92+

*Warm Dim: 4.8 Watts

	1CF 2K6K																	
WATTS PER FOOT	5W									10W								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (lm/ft)	198	201	203	206	209	214	234	252	270	479	499	518	538	557	596	639	645	651
LUMENS PER WATT (lm/w)	53	50	51	52	52	54	90	63	75	52	52	54	56	58	62	67	67	71
CRI	91+	91+	91+	94+	93+	92+	92+	91+	91+	91+	91+	91+	94+	93+	92+	92+	91+	91+

	1DF 2K6K																	
WATTS PER FOOT	5W									10W								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (lm/ft)	226	229	232	235	238	244	267	288	308	546	568	591	613	635	680	729	735	742
LUMENS PER WATT (lm/w)	61	57	58	59	60	61	90	72	86	59	59	62	64	66	71	76	77	81
CRI	91+	91+	91+	94+	93+	92+	92+	91+	91+	91+	91+	91+	94+	93+	92+	92+	91+	91+

	2CF 2K6K																	
WATTS PER FOOT	5W									10W								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (lm/ft)	208	211	213	216	219	225	246	265	283	503	523	544	564	585	626	671	677	683
LUMENS PER WATT (lm/w)	56	53	53	54	55	56	90	66	79	55	54	57	59	61	65	70	71	74
CRI	91+	91+	91+	94+	93+	92+	92+	91+	91+	91+	91+	91+	94+	93+	92+	92+	91+	91+

	2DF 2K6K																	
WATTS PER FOOT	5W									10W								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (lm/ft)	235	239	242	245	248	255	279	300	321	570	593	616	639	663	709	760	767	774
LUMENS PER WATT (lm/w)	64	60	60	61	62	64	90	75	89	62	62	64	67	69	74	79	80	84
CRI	91+	91+	91+	94+	93+	92+	92+	91+	91+	91+	91+	91+	94+	93+	92+	92+	91+	91+

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

TRAPEZE 360

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

REV.04.04.25

	1CF 27K6													
WATTS PER FOOT	5W							10W						
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (lm/ft)	214	254	261	268	293	315	300	535	547	568	588	582	577	575
LUMENS PER WATT (lm/w)	54	51	52	54	59	63	75	67	59	62	64	63	63	72
CRI	94+	93+	92+	92+	92+	92+	91+	94+	93+	92+	92+	92+	92+	91+

	1DF 27K6													
WATTS PER FOOT	5W							10W						
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (lm/ft)	244	290	298	306	334	359	342	610	624	647	670	663	658	655
LUMENS PER WATT (lm/w)	61	58	60	61	67	72	86	76	68	70	73	72	71	82
CRI	94+	93+	92+	92+	92+	92+	91+	94+	93+	92+	92+	92+	92+	91+

	2CF 27K6													
WATTS PER FOOT	5W							10W						
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (lm/ft)	225	267	274	281	307	331	315	561	574	596	617	610	605	603
LUMENS PER WATT (lm/w)	56	53	55	56	61	66	79	70	62	65	67	66	66	75
CRI	94+	93+	92+	92+	92+	92+	91+	94+	93+	92+	92+	92+	92+	91+

	2DF 27K6													
WATTS PER FOOT	5W							10W						
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (lm/ft)	254	302	310	319	348	375	357	636	651	675	699	691	686	684
LUMENS PER WATT (lm/w)	64	60	62	64	70	75	89	79	71	73	76	75	75	85
CRI	94+	93+	92+	92+	92+	92+	91+	94+	93+	92+	92+	92+	92+	91+

	1CF TRUCOLOR RGBTW									
WATTS PER FOOT	10W									
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	
LUMENS PER FOOT (lm/ft)	240	378	458	514	531	560	605	425	391	
LUMENS PER WATT (lm/w)	44	41	53	60	62	64	72	72	81	
CRI	92+	94+	95+	95+	96+	97+	97+	92+	90+	

	1DF TRUCOLOR RGBTW									
WATTS PER FOOT	10W									
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	
LUMENS PER FOOT (lm/ft)	274	410	498	559	577	609	657	462	425	
LUMENS PER WATT (lm/w)	51	45	57	66	68	70	78	78	89	
CRI	92+	94+	95+	95+	96+	97+	97+	92+	90+	

	2CF TRUCOLOR RGBTW									
WATTS PER FOOT	10W									
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	
LUMENS PER FOOT (lm/ft)	252	378	458	514	531	560	605	425	391	
LUMENS PER WATT (lm/w)	47	41	53	60	62	64	72	72	81	
CRI	92+	94+	95+	95+	96+	97+	97+	92+	90+	

	2DF TRUCOLOR RGBTW									
WATTS PER FOOT	10W									
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	
LUMENS PER FOOT (lm/ft)	286	428	519	583	602	635	685	482	443	
LUMENS PER WATT (lm/w)	53	47	60	69	71	73	82	82	92	
CRI	92+	94+	95+	95+	96+	97+	97+	92+	90+	

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

TRAPEZE 360

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

REV 04.04.25


LENGTH CHART

LENGTH CHART - STATIC & TUNABLE WHITE											
Ordering Code (Nominal Size)	Actual Length	Ordering Code (Nominal Size)	Actual Length	Ordering Code (Nominal Size)	Actual Length	Ordering Code (Nominal Size)	Actual Length	Ordering Code (Nominal Size)	Actual Length	Ordering Code (Nominal Size)	Actual Length
8	7.95	77	77.55	147	147.15	214	214.35	281	281.55	348	348.75
10	10.35	80	79.95	149	149.55	216	216.75	284	283.95	351	351.15
12	12.75	82	82.35	152	151.95	219	219.15	286	286.35	353	353.55
15	15.15	84	84.75	154	154.35	221	221.55	288	288.75	356	355.95
17	17.55	87	87.15	156	156.75	224	223.95	291	291.15	358	358.35
20	19.95	89	89.55	159	159.15	226	226.35	293	293.55	360	360.75
22	22.35	92	91.95	161	161.55	228	228.75	296	295.95	363	363.15
24	24.75	94	94.35	164	163.95	231	231.15	298	298.35	365	365.55
27	27.15	96	96.75	166	166.35	233	233.55	300	300.75	368	367.95
29	29.55	99	99.15	168	168.75	236	235.95	303	303.15	370	370.35
32	31.95	101	101.55	171	171.15	238	238.35	305	305.55	372	372.75
34	34.35	104	103.95	173	173.55	240	240.75	308	307.95	375	375.15
36	36.75	106	106.35	176	175.95	243	243.15	310	310.35	377	377.55
39	39.15	108	108.75	178	178.35	245	245.55	312	312.75	380	379.95
41	41.55	111	111.15	180	180.75	248	247.95	315	315.15	382	382.35
44	43.95	113	113.55	183	183.15	250	250.35	317	317.55	384	384.75
46	46.35	116	115.95	185	185.55	252	252.75	320	319.95	387	387.15
48	48.75	118	118.35	188	187.95	255	255.15	322	322.35	389	389.55
51	51.15	120	120.75	190	190.35	257	257.55	324	324.75	392	391.95
53	53.55	123	123.15	192	192.75	260	259.95	327	327.15	394	394.35
56	55.95	125	125.55	195	195.15	262	262.35	329	329.55	396	396.75
58	58.35	128	127.95	197	197.55	264	264.75	332	331.95	399	399.15
60	60.75	130	130.35	200	199.95	267	267.15	334	334.35	401	401.55
63	63.15	132	132.75	202	202.35	269	269.55	336	336.75	404	403.95
65	65.55	135	135.15	204	204.75	272	271.95	339	339.15	406	406.35
68	67.95	137	137.55	207	207.15	274	274.35	341	341.55	408	408.75
70	70.35	140	139.95	209	209.55	276	276.75	344	343.95	411	411.15
72	72.75	142	142.35	212	211.95	279	279.15	346	346.35	413	413.55
75	75.15	144	144.75								

LENGTH CHART - WARM DIM											
Ordering Code (Nominal Size)	Actual Length	Ordering Code (Nominal Size)	Actual Length	Ordering Code (Nominal Size)	Actual Length	Ordering Code (Nominal Size)	Actual Length	Ordering Code (Nominal Size)	Actual Length	Ordering Code (Nominal Size)	Actual Length
6	6.75	75	75.75	138	138.75	207	207.75	276	276.75	345	345.75
9	9.75	78	78.75	141	141.75	210	210.75	279	279.75	348	348.75
12	12.75	81	81.75	144	144.75	213	213.75	282	282.75	351	351.75
15	15.75	84	84.75	147	147.75	216	216.75	285	285.75	354	354.75
18	18.75	87	87.75	150	150.75	219	219.75	288	288.75	357	357.75
21	21.75	90	90.75	153	153.75	222	222.75	291	291.75	360	360.75
24	24.75	93	93.75	156	156.75	225	225.75	294	294.75	363	363.75
27	27.75	96	96.75	159	159.75	228	228.75	297	297.75	366	366.75
30	30.75	99	99.75	162	162.75	231	231.75	300	300.75	369	369.75
33	33.75	102	102.75	165	165.75	234	234.75	303	303.75	372	372.75
36	36.75	105	105.75	168	168.75	237	237.75	306	306.75	375	375.75
39	39.75	108	108.75	171	171.75	240	240.75	309	309.75	378	378.75
42	42.75	111	111.75	174	174.75	243	243.75	312	312.75	381	381.75
45	45.75	114	114.75	177	177.75	246	246.75	315	315.75	384	384.75
48	48.75	117	117.75	180	180.75	249	249.75	318	318.75	387	387.75
51	51.75	120	120.75	183	183.75	252	252.75	321	321.75	390	390.75
54	54.75	123	123.75	186	186.75	255	255.75	324	324.75	393	393.75
57	57.75	126	126.75	189	189.75	258	258.75	327	327.75	396	396.75
60	60.75	129	129.75	192	192.75	261	261.75	330	330.75	399	399.75
63	63.75	132	132.75	195	195.75	264	264.75	333	333.75	402	402.75
66	66.75	135	135.75	198	198.75	267	267.75	336	336.75	405	405.75
69	69.75			201	201.75	270	270.75	339	339.75	408	408.75
72	72.75			204	204.75	273	273.75	342	342.75	411	411.75


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

WIRING DIAGRAM: Single Junction Box for TruColor RGBTW

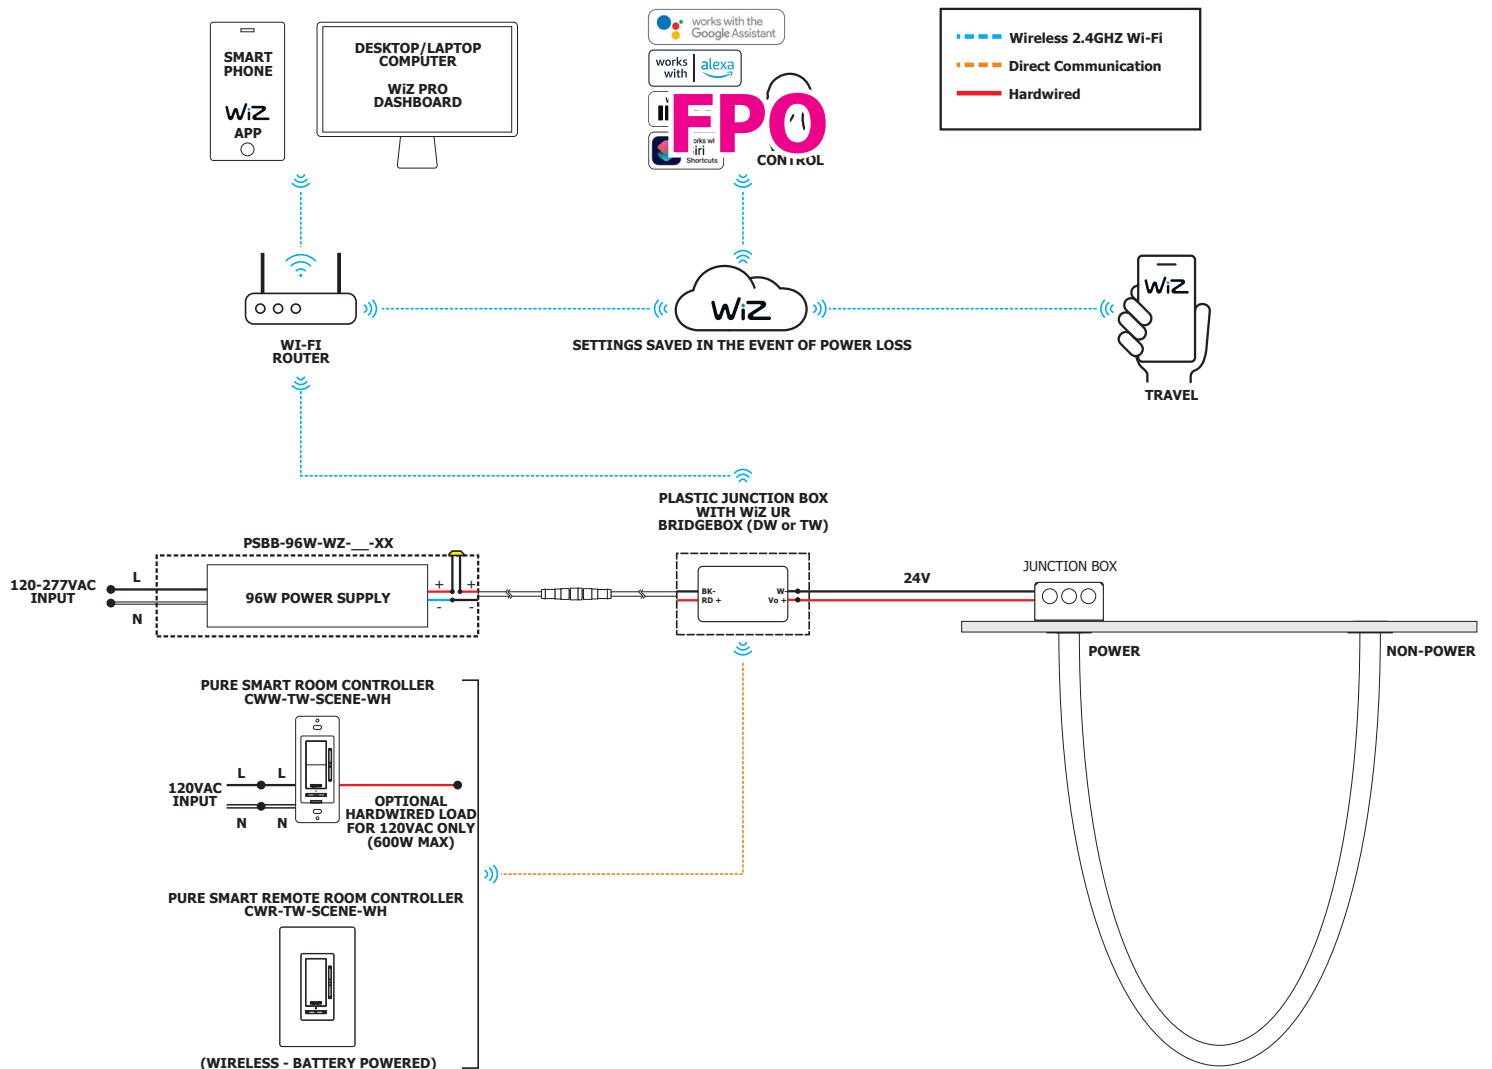

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

WIRING DIAGRAM: Multiple Junction Boxes for TruColor RGBTW

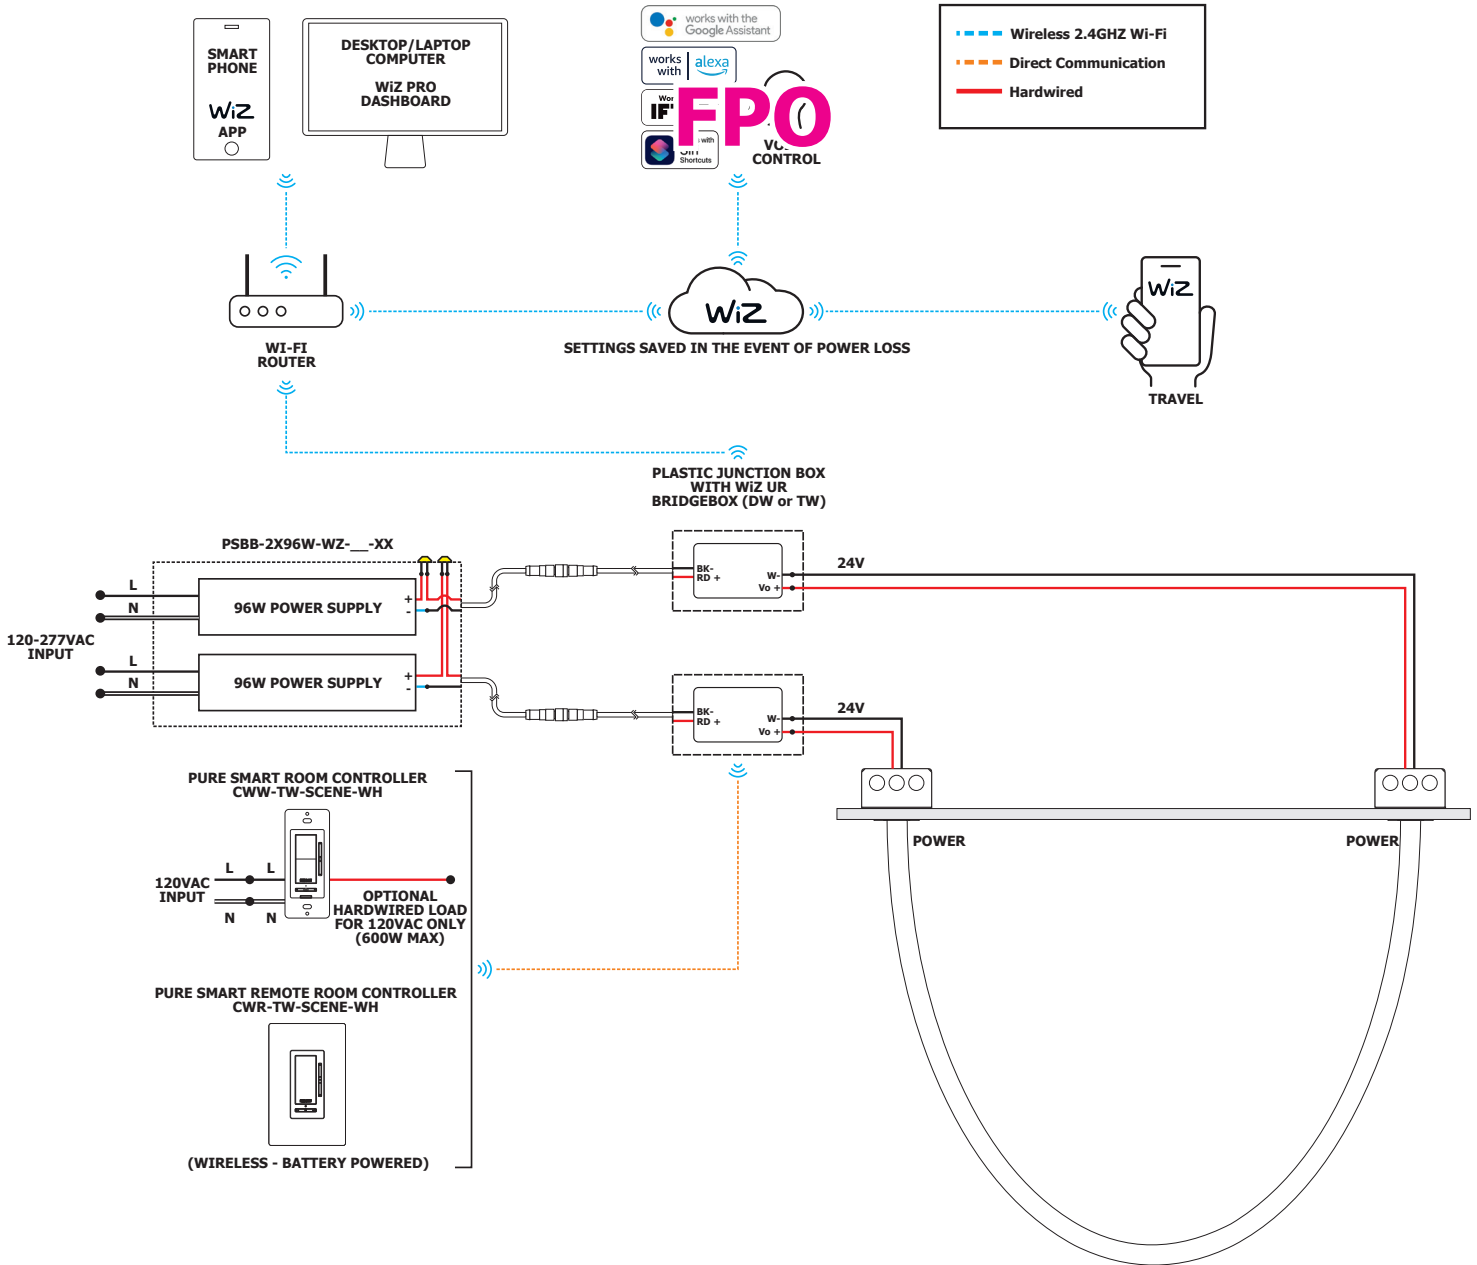


LED STRIP TM30 DATA

24VDC INDOOR / OUTDOOR 2W | 5W STATIC WHITE, WARM DIM & TUNABLE WHITE

TM-30-15 DATA: The data below is for ST2A, ST5A, ST7A and ST10A bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2200K | Rf: 90.5 | Rg: 99.9

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	88.3	-5.2%	1.0%
2	90.1	-3.6%	3.7%
3	87.5	-0.5%	5.6%
4	93.9	-1.2%	1.3%
5	94.7	0.7%	2.1%
6	93.7	2.6%	0.7%
7	93.5	-1.5%	-2.2%
8	97.8	-0.4%	-0.2%
9	93.7	-1.5%	2.4%
10	90.8	-0.8%	4.9%
11	89.3	3.7%	5.4%
12	90.2	4.6%	1.0%
13	89.0	4.4%	-9.7%
14	75.4	0.6%	-15.1%
15	90.7	-1.7%	-5.0%
16	84.2	-4.4%	-9.1%

2400K | Rf: 90.2 | Rg: 99.3

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	89.0	-4.8%	1.1%
2	90.4	-3.7%	3.2%
3	88.1	-0.7%	5.2%
4	93.0	-2.1%	0.9%
5	94.5	-0.1%	2.0%
6	94.7	1.7%	0.6%
7	93.7	-1.9%	-1.5%
8	96.8	-1.2%	0.2%
9	91.9	-1.8%	3.7%
10	88.8	-0.9%	6.1%
11	87.5	3.8%	7.1%
12	89.6	4.3%	0.3%
13	88.1	4.2%	-9.1%
14	82.5	2.8%	-10.6%
15	91.4	-2.1%	-4.2%
16	84.0	-3.6%	-9.9%

2700K | Rf: 89.5 | Rg: 98.3

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	88.6	-5.2%	0.9%
2	90.3	-3.6%	2.9%
3	88.4	-1.5%	5.0%
4	91.9	-2.5%	1.4%
5	93.5	-0.9%	2.3%
6	95.7	0.9%	-0.4%
7	91.1	-3.7%	-0.5%
8	95.8	-2.0%	0.4%
9	90.5	-2.6%	4.5%
10	84.9	-1.1%	8.7%
11	85.0	2.3%	9.8%
12	88.1	5.5%	1.5%
13	90.9	2.9%	-5.2%
14	86.2	4.3%	-8.9%
15	90.7	-2.4%	-3.6%
16	83.0	-2.7%	-11.3%

3000K | Rf: 88.7 | Rg: 98.2

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	88.3	-5.2%	0.8%
2	90.2	-3.7%	2.7%
3	88.3	-1.6%	4.9%
4	92.2	-2.0%	1.8%
5	91.0	-3.5%	1.8%
6	95.8	0.4%	-0.4%
7	90.2	-4.4%	-0.0%
8	94.8	-2.6%	0.8%
9	89.2	-2.9%	6.0%
10	81.4	-1.5%	9.7%
11	82.9	2.3%	10.5%
12	88.3	6.7%	1.9%
13	91.9	2.8%	-4.0%
14	86.3	4.9%	-8.3%
15	87.1	-1.2%	-6.1%
16	83.2	-1.7%	-11.6%

3500K | Rf: 88.1 | Rg: 97.1

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	87.8	-5.2%	1.0%
2	90.8	-3.3%	2.3%
3	89.8	-1.6%	3.9%
4	91.0	-2.7%	0.9%
5	90.0	-5.4%	0.7%
6	95.6	-0.9%	-0.4%
7	90.0	-5.3%	1.4%
8	91.8	-3.6%	3.0%
9	87.1	-2.9%	7.3%
10	80.1	-1.3%	12.2%
11	81.8	4.1%	10.5%
12	88.2	5.1%	2.3%
13	92.4	2.1%	-3.8%
14	86.6	5.0%	-7.9%
15	86.2	-0.7%	-6.8%
16	84.5	-2.1%	-7.0%

2700D | Rf: 90.7 | Rg: 101.1

Color Vector Graphic



■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	90.9	-4.1%	1.1%
2	91.8	-2.2%	3.2%
3	89.0	0.2%	5.0%
4	92.9	-1.1%	0.8%
5	93.9	1.1%	1.7%
6	93.3	3.3%	0.0%
7	93.1	-0.5%	-1.9%
8	97.2	-0.3%	-0.9%
9	93.4	-1.0%	3.2%
10	89.9	-0.1%	5.6%
11	87.0	4.7%	7.2%
12	89.2	5.8%	-0.2%
13	89.1	3.5%	-6.7%
14	86.3	4.1%	-9.2%
15	91.4	-2.0%	-3.6%
16	84.7	-2.1%	-10.3%


LED STRIP TM30 DATA

24VDC INDOOR / OUTDOOR 2W | 5W STATIC WHITE, WARM DIM & TUNABLE WHITE

TM-30-15 DATA: The data below is for ST2A, ST5A, ST7A and ST10A bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

3000D | Rf: 90.6 | Rg: 101.1

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	91.5	-3.5%	1.3%
2	92.2	-1.8%	3.0%
3	89.3	0.5%	4.8%
4	92.7	-1.1%	0.6%
5	93.3	0.5%	1.4%
6	93.8	2.7%	-0.8%
7	91.2	-2.1%	-0.2%
8	97.0	-0.5%	-0.7%
9	92.5	-0.7%	3.8%
10	88.3	0.9%	7.1%
11	87.5	3.9%	7.6%
12	88.2	6.2%	-0.2%
13	89.9	3.4%	-6.0%
14	86.9	4.4%	-8.5%
15	91.9	-1.9%	-2.9%
16	84.7	-1.3%	-10.6%

3000K (2K6K) | Rf: 90.5 | Rg: 100.7

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	91.5	-3.5%	1.2%
2	92.4	-1.8%	2.7%
3	89.8	0.3%	4.5%
4	92.4	-1.7%	0.4%
5	93.3	-0.1%	1.4%
6	94.5	2.1%	-0.6%
7	91.0	-2.5%	0.3%
8	96.9	-0.8%	-0.2%
9	91.6	-0.9%	4.6%
10	86.7	0.7%	7.8%
11	86.3	3.8%	8.5%
12	88.3	6.1%	0.6%
13	90.9	3.1%	-5.2%
14	87.3	4.7%	-7.9%
15	92.1	-1.9%	-2.5%
16	84.5	-0.9%	-10.9%

2000K ONLY (2K6K) | Rf: 90.6 | Rg: 98.5

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	87.7	-5.5%	1.2%
2	88.7	-3.9%	4.2%
3	90.5	-1.5%	4.3%
4	95.0	-1.7%	0.8%
5	95.2	-0.2%	2.1%
6	94.2	1.6%	1.9%
7	95.9	-0.8%	-2.2%
8	95.5	-1.7%	1.3%
9	93.8	-1.4	2.6%
10	91.9	-0.7%	4.2%
11	91.3	3.6%	3.7%
12	91.2	4.2%	-1.0%
13	86.6	3.8%	-12.7%
14	67.2	-3.0%	-16.3%
15	84.9	-3.3%	-9.4%
16	84.2	-5.7%	-7.5%

4000K ONLY (2K6K) | Rf: 86.4 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	86.5	-5.5%	1.3%
2	90.4	-3.0%	2.3%
3	89.8	-2.1%	3.6%
4	89.1	-3.4%	0.4%
5	88.5	-5.9%	0.1%
6	93.6	-3.0%	-0.4%
7	88.9	-6.2%	1.7%
8	87.3	-5.0%	4.9%
9	82.4	-3.6%	11.3%
10	77.4	-1.8%	12.7%
11	79.8	4.9%	11.4%
12	88.7	4.4%	2.7%
13	88.7	4.0%	-5.1%
14	91.2	2.2%	-3.8%
15	82.7	-0.1%	-9.2%
16	82.8	-2.2%	-7.6%

6500K ONLY (2K6K) | Rf: 86.8 | Rg: 96.8

Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	86.5	-4.7%	0.8%
2	91.9	-2.5%	3.1%
3	91.2	-2.0%	1.9%
4	91.2	-1.6%	1.4%
5	85.7	-6.2%	-0.9%
6	92.9	-3.5%	-1.0%
7	92.1	-4.7%	0.7%
8	85.2	-5.8%	4.9%
9	82.8	-6.2%	14.3%
10	77.1	-0.7%	15%
11	72.1	5.8%	14.1%
12	91.6	4.0%	1.0%
13	89.9	5.6%	-2.3%
14	90.5	-1.8%	-3.7%
15	81.6	6.5%	-13.9%
16	92.8	-3.6%	-0.4%

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--