

s.u.i Water Ionizer Machine

Water Ionizer Machine



Bold Vision

To break away from the conventional "Boxy" designs that dominate the market and create something truly unconventional, Dynamic, and Authentic beyond the trend.

Design Trend In Current Market



s.u.i design

Recognizing a desire for 'Authenticity, Not Trends,' we endeavored to create something different. This resulted in a Water-Inspired, Story-Driven design that we feel stands apart.



The name "**Sui**" originates from the Japanese character for water \mathcal{X} and it means water.

The design finds its inspiration in the gentle ripples of spring water in the forest, and through its elegant lines and fluid movement, it aspires to reflect water's inherent grace. This approach is meant to embody the Eastern philosophy of humanity's harmonious coexistence with nature, and we trust it will enrich the product with aesthetic depth. Each curve and subtle undulation aims to capture the essence of pure water, often brimming with revitalizing negative ions. This endeavors to be a visual symphony that invites the user to experience nature's purest calm.



Design for Recyclability : The front cover's mirror-finish, paint-free cabinets aim to offer a dual advantage. they are designed to be environmentally friendly and easy to clean.










S.u.i's clean lines and intuitive operation aim to make it a welcome addition to the contemporary home.





Ease of Pressing and Visibility: Buttons are spaced to facilitate easy pressing and are positioned on a 10-degree tilt.

The LEDs are arranged radially in stepped increments by function, aiming to enhance visibility.

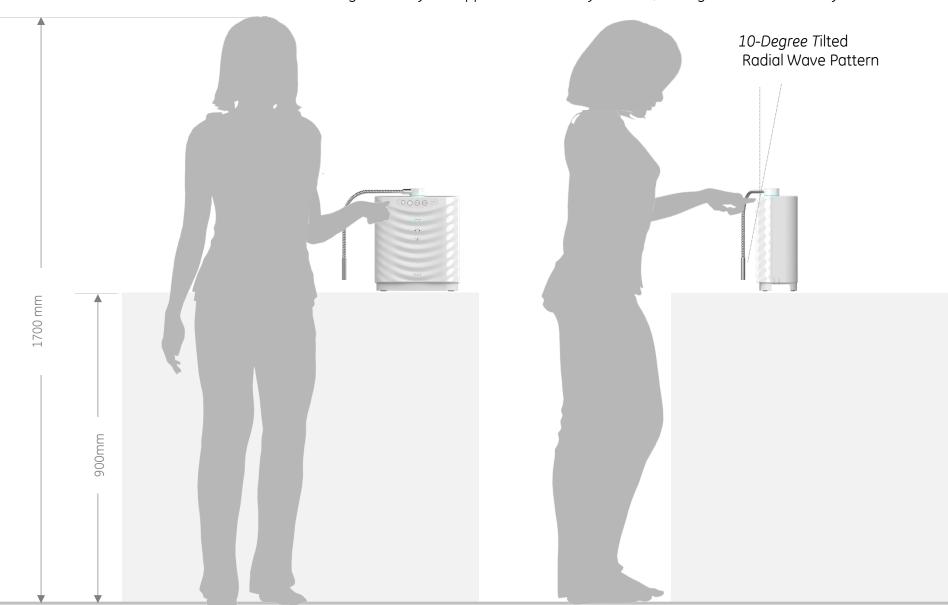

Flexible Installation: A 360-degree rotating flexible pipe significantly increases freedom in placement.




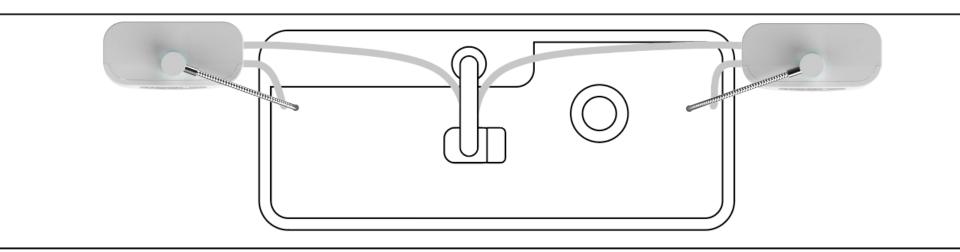

Intuitive Control Panel Design: Minimalist design with essential buttons and LED indicators.



Easy Maintenance: Simply remove the cover on the back right, release the locking lever, pull up the old cartridge, and replace It with a new one.

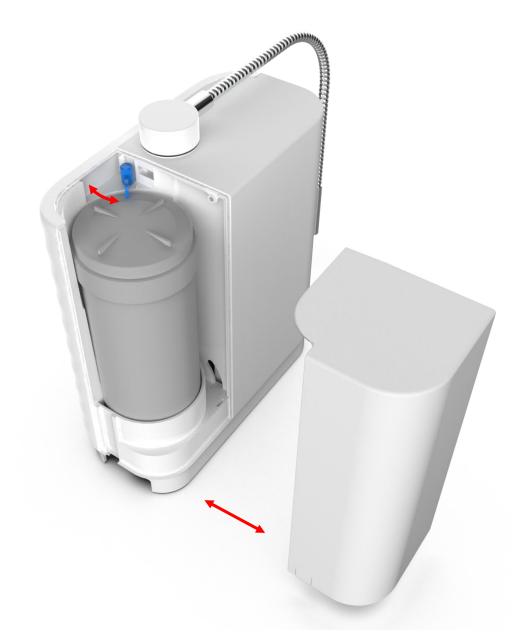

Easy Faucet Installation Parts: The kit includes parts designed for four different faucet types.

| TYPE-1 | TYPE- ② | түре-🔞 | түре-4 |
|------------------|----------------|--------|--------|
| | | | |
| 16mm 17.5mm 19mm | | | |
| 1 | | | |
| | | | |



Water Ionizer Machine

7 Key Features of Electrolyzed Hydrogen Water



Level 1
For Drinking (When First Starting)





Functionality 14/24

Level 2
For Drinking , Cooking Rice





Functionality 15 / 24

Level 3

For Drinking, Coffee, Tea, Hotpots, Soups, etc.



Functionality 16/24

Level 4
For Cooking (Boiling, Skimming, etc.)





Acidic Water: Another type of water produced through electrolysis.

It's Ideal for washing your face or as aleaning water to make household chores easier.

Level 1
For Washing Face (Mildly Acidic, Close to Skin)
Not for Drinking





Functionality 18/24

Acidic Water: Another type of water produced through electrolysis.

It's Ideal for washing your face or as aleaning water to make household chores easier.

Level 2
For Washing Dishes, Wiping Surfaces, etc.
Not for Drinking





Functionality 19/24

Purified Water: The base water produced by "s.u.i".

This water has superior purification capabilities, removing 22 substances like chlorine and lead.

Level 2
For Drinking (Taking Medicine)
Preparing Baby Formula, etc.)





Ecological and Economical



10,000 liters of purification capacity from a single cartridge The purification capacity of the dedicated "Sui" cartridge is approximately **10,000 liters**. This offers a significant cost advantage and helps create an eco-friendly water environment by reducing the use of plastic bottles.


Replacement guideline: 12 months or total water volume: 10,000 liters (The image displays a filter cartridge alongside six 2-liter PET bottles, indicating "2 liters of PET bottle" and "Approx, 4,165 bottles," accompanied by an "ECO" mark) *The timing for replacing the water purification cartridge varies depending on water volume, water quality, and water pressure. *Replacement timing is indicated by a lamp and voice guidance on the main unit. *Purification capacity is 10,000 liters: calculated as the amount of purified water produced by subtracting wastewater (approx. 16.7%) and assuming a water intake/discharge ratio of 5:1.



s.u.i Per 1 Liter Approx ¥7 (0.041 Euros)

Typical Mineral Water Per 1 Liter Approx ¥100 (0.59 Euros) **Nihon Trim's Unique Innovative Technologies :** Nihon Trim Has Developed Unique Innovative Technologies Primarily Based on "Electrolyzed Hydrogen Water" and Is Applying Them in Various Fields. Their Key Technologies and Application Areas Are as Below.









Long-Lasting Electrode Lifespan: Approx. 2,000 Hours Achieving Stable Electrolytic Capacity

The electrode plates, which largely generate hydrogen, resist deterioration due to durability and resistance to oxidation, even when used for approximately 1,200 hours (10 hours per day, 120 days per year). The system maintains stable electrolytic capacity for about 4,000 hours (approximately 10 years).

Maintenance-free: achieved through proprietary technology Electrodes periodically switched

Manual cleaning or regular maintenance of the internal components is not necessary. To prevent mineral buildup on the electrodes, a "double-auto change cross-line method" is employed, which periodically switches the electrodes.

Eco mode also available: equipped with water intake ratio adjustment function

"Sui" features an adjustment function for the water intake/discharge ratio (standard 5:1). Through electrolysis, two types of water (electrolyzed water and acidic water) are produced simultaneously. This allows you to change the ratio to further reduce wastewater by increasing the amount of water intake.

Excellent Water Purification Performance

Removes 22 Substances: High-Performance Water Purification Cartridge

By Using Ultra-Fine Activated Carbon (Micro Carbon), High Water Purification Capability Is Achieved.

It Quickly Adsorbs Dissolved Substances and Also Removes Minute Particles.

22 Substances for Removal

1.Residual chlorine

2.Turbidity

3.Chloroform

4.Bromodichloromethane

5.Dibromochloromethane

6.Bromoform

7.Tetrachloroethylene

8.Trichloroethylene

9.Total trihalomethane X1

10.CAT (Pesticides) ×2

11.2-MIB (Mold Odor) X3

12.Dissolved lead

13.1,2-DCE X4

14.Benzene

15.Geosmin (Mold Odor)

16.Anion surfactants

17.Phenols


18.PFOS and PFOA X5,6

19.Iron (particulate) 💥 6

20 Iron (soluble) × 6

21. Manganese (soluble) 💥 6

22.Aluminum (neutral) ×6

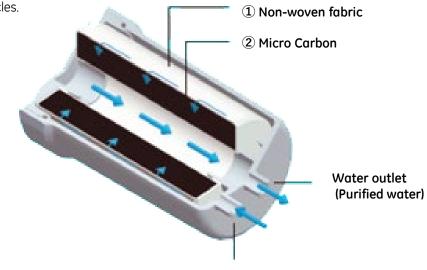

Water inlet (Tap water)

Activated Carbon with NSF Certification 💥 Obtained


[NSF Certification Manufacturer/Product Name] Kuraray Chemical Co., Ltd. / T-SCO 60 / 150THM Futamura Chemical Co., Ltd. / CN8200G

•NSF International is a globally recognized public health and safety organization. Certification is not granted unless clear criteria are met

Notes:

- 💥 1. Chloroform, Bromodichloromethane, Dibromochloromethane, Bromoform are all types of trihalomethanes.
- *2. 2,4-dichlorophenoxyacetic acid, 2,4,5-trichlorophenoxyacetic acid, 1,3,5-triazine, and other commonly used agricultural chemicals.
- 💥 3. 2-methylisoborneol, a substance that causes moldy odor in tap water.
- 💥 4. Cis-1,2-dichloroethylene and trans-1,2-dichloroethylene are isomers.
- 💥 5. Per- and polyfluoroalkyl substances (PFAS) are a type of.
- **%**6. Substances specified by JWPA B standard.

Dimension And Weight

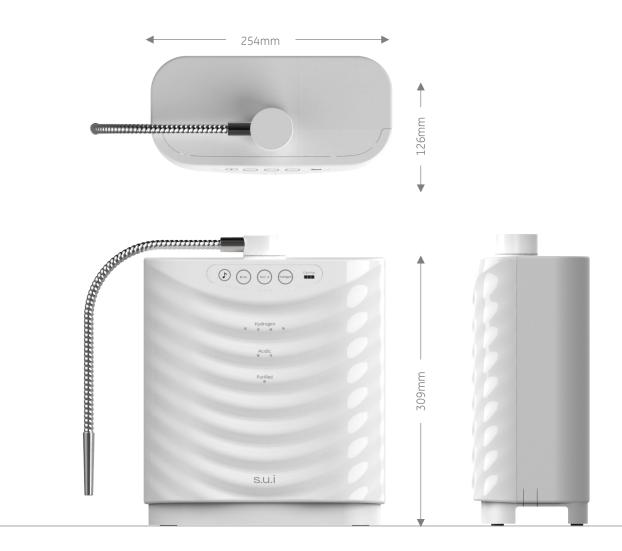

Weight 3.3kg

| Category | Medical Device | Rated Water Flow | Electrolyzed water approx. 4 liters/min (max.) Acidic water approx. 4 liters/min (max.) Purified water approx. 5 liters/min (max.) |
|--|---|-----------------------------------|--|
| Sales Name | s.u.i | Water Discharge Ratio | 5:1 |
| Medical Device Manufacturing Certification Number | 305AGBZX00019000 | Usable Water Temperature | Below 35°C |
| Rated Voltage | AC100V | Main Unit Weight | Approx. 3.3kg |
| Rated Frequency | 50-60Hz | Power Cord Length | Approx. 2.7m |
| Rated Current | AC4.5A | Main Unit Dimensions | 254.4 (W) x 308.7 (H) x 126.2 (D) mm |
| Standby Power | Approx. 0.8W | Electrolytic Cell Cleaning Method | Double Auto-Change Cross-Line Method |
| Power Consumption | Approx. 260W | Power Circuit | Switching Regulator Control Method |
| Isolated Electrolytic Cell Voltage | 50V (max.) | Main Unit Functions | Electrolytic Cell Water Flow Detection & It; br>Water Leakage Detection Alarm (Prevents excessive water pressure)&I t; br>Rated Current Control Circuit & It; br>Overheat Protection Device &It br>Fuse (Built-in circuit board): 8.0A |
| Number of Isolated Electrolytic Cells (Electrodes) | 4 cells (8 electrodes) Platinum- coated electrodes (5 electrodes) | | |
| Electrode Lifespan | Approx. 2000 hours of operation (varies depending on water quality, water volume, and usage conditions) | | |
| Method of Producing Electrolyzed Water | 1-way method | | |